

TM

APOLLOPEX

PEX Tools and Valves

How PEX Tubing IS JOINED

PEX distribution systems are manufactured and listed to industry standards published by ASTM International.

The most common ways to join PEX tubing and PEX polymer or metal fittings are:



Copper Crimp Ring (CCR)

ASTM F1807 | "Crimp Rings"



PEX Multihead Tool

68PXMHT

Interchangeable inserts for 3/8", 1/2", 3/4" and 1"

PEX Large Tool

68PXSCT3 (1/2")

68PXSCT4 (3/4")

68PXSCT5 (1")

PEX Small Tool

68PXA3 (1/2")

68PXA4 (3/4")

Compact, Angle Design



Stainless Steel Clamp (SSC)

ASTM F2098 | "Oetiker" | "Murray" | "Pinch Clamp" | "Cinch Clamp"



PEX SSC Ratchet Tool

68PXSSCRT


Compact, LED Indicator lights, capable of crimping 3/8", 1/2", 3/4" and 1" clamps

PEX SSC Small Tool

68PXSSCT

Compact, capable of crimping 3/8", 1/2", 3/4" and 1" clamps

Combined copper crimp rings and stainless steel clamps are the most popular methods of PEX joining. However, there are other methods often found in the industry. With the exception of our tube cutters, Apollo PEX tools should not be used to complete any of the following joints:

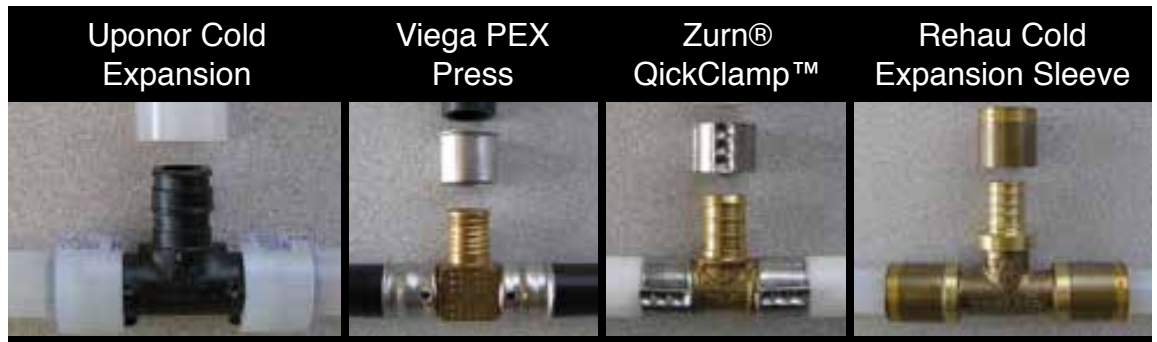

APOLLO VALVES Customer Service (704) 841-6000

www.apollovalves.com



APOLLOPEX™ Tool PACKAGING EXAMPLES

Our tools are found in Apollo branded packaging with crimp instructions on the box and/or in the package. Tools are commonly found at the counter or on a shelf or peg board behind it.

The following are examples of our packaged products:

PEX Multihead Tool

68PXMHT
Interchangeable inserts for
3/8", 1/2", 3/4" and 1"



front



back

PEX Small Tool

68PXACT3
PEX CCR - 1/2"

PEX Large Tool

68PXACT3
PEX CCR - 1/2"

front



front

back



back



ELKHART PRODUCTS CORPORATION Customer Service (574) 264-3181

www.elkhartproducts.com

APOLLOPEX™ Tool

PACKAGING EXAMPLES

PEX Small Tool

68PXSSCT
PEX SSC - 3/8", 1/2", 3/4", 1"



front

back

PEX Ratchet Tube Cutter

68PXTRC
PEX 3/8", 1/2", 3/4", 1"



front

back

PEX Small Ratchet Tool

68PXSCRT
PEX SSC - 3/8", 1/2", 3/4", 1"



front

back

PEX Removal Tool

68PXCRT
PEX CCR - 3/8", 1/2", 3/4", 1"



front

back

VALVES

PEX Ball Valve

94XLF - 1/2", 3/4", 1"



The Apollo® International 94XLF Lead Free DZR forged brass ball valves combine reliable operation with maximum economy. Ideal for plumbing and heating applications including potable water. ASTM F1807 style PEX connections. Valves are ANSI 3rd party Lead Free certified and listed to NSF 14, NSF 61 and NSF 372.