



# Double Block and Bleed with Ultra-Low Emission options

Catalog 4190-FP

aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding









ENGINEERING YOUR SUCCESS.

## Introduction

Parker Hannifin's response to the demand for reduction in leakage paths has been the combination of primary and secondary valves into one compact unit. The combining of piping and instrument valves into a single unit has benefitted various markets. We now offer a range of Ultra-Low Emission products which meet class A or class B levels of ISO 15848 standard for Ultra-Low emissions, as required.

Parker Hannifin can offer the unique combination of double block and bleed valve systems together with integral fittings, both being designed and produced by one company. Selection of this combination results in the elimination of taper thread connections and the need for thread sealant. For more information on leak path reductions and how to combine connections and valves into one unit, please contact us.

## Contents

Page 2	Introduction.	
Page 3	Application illustrations.	
Page 4	Ball valve specification.	
Page 5	Outside screw and yoke (O.S.&Y.) valve specification.	
Page 6	Globe style needle valve specification.	
Page 7	Bolted bonnet.	
Page 8/11	Monoflange (MF) manifolds.	
Page 12/15	ANSI/ASME B31.1 Monoflange manifolds.	
Page 16/22	Pro-Bloc (PB) manifolds.	
Page 23/24	Meeting the ISO Standard	
Page 25/31	Ultra-Low Emission solutions	

## Primary, secondary and vent valve applications and installations

### Solutions

Parker Hannifin offers the unique solution by incorporating primary and secondary valve systems into one complete block. In addition traditional instrument taper thread connections can be totally eliminated resulting in systems being free of thread sealant contamination.

### Conventional Installation [1]

- A welded flange, connected to a primary ANSI class isolating valve. The primary valve will be connected to a secondary instrument valve. A pressure gauge or transmitter will then be installed downstream of the instrument valve

### Parker Pro-Bloc® [2]


- A one-piece integral forging incorporating up to 3 ball valves or mixture of ball and needle design.
  - Improved safety: leak paths reduced by up to 60%
  - Reduced costs: installation and component costs reduced by up to 70%
  - Reduced weight: by up to 80%
  - Reduced susceptibility to problems caused by vibration.
- See pages 23-31 for standard and Ultra-Low Emission products.

### Parker Monoflange [3]

- More compact than Pro-Bloc, adding further space and weight saving possibilities
  - Improved safety: leak paths reduced by up to 60%, less susceptibility to vibration
  - Reduced costs: installation and component costs reduced by up to 80%
  - Reduced weight: by up to 85%
- See pages 11-16 for standard and pages 23-31 for Ultra-Low Emission products

### Parker Hi-Pro Manifolds [4]

- Enables the user to continue to use traditional NPT threaded connections and at the same time utilise the double block and bleed principals Available in several combinations of ball and needle valves Full details can be found in CAT 4190 HBM

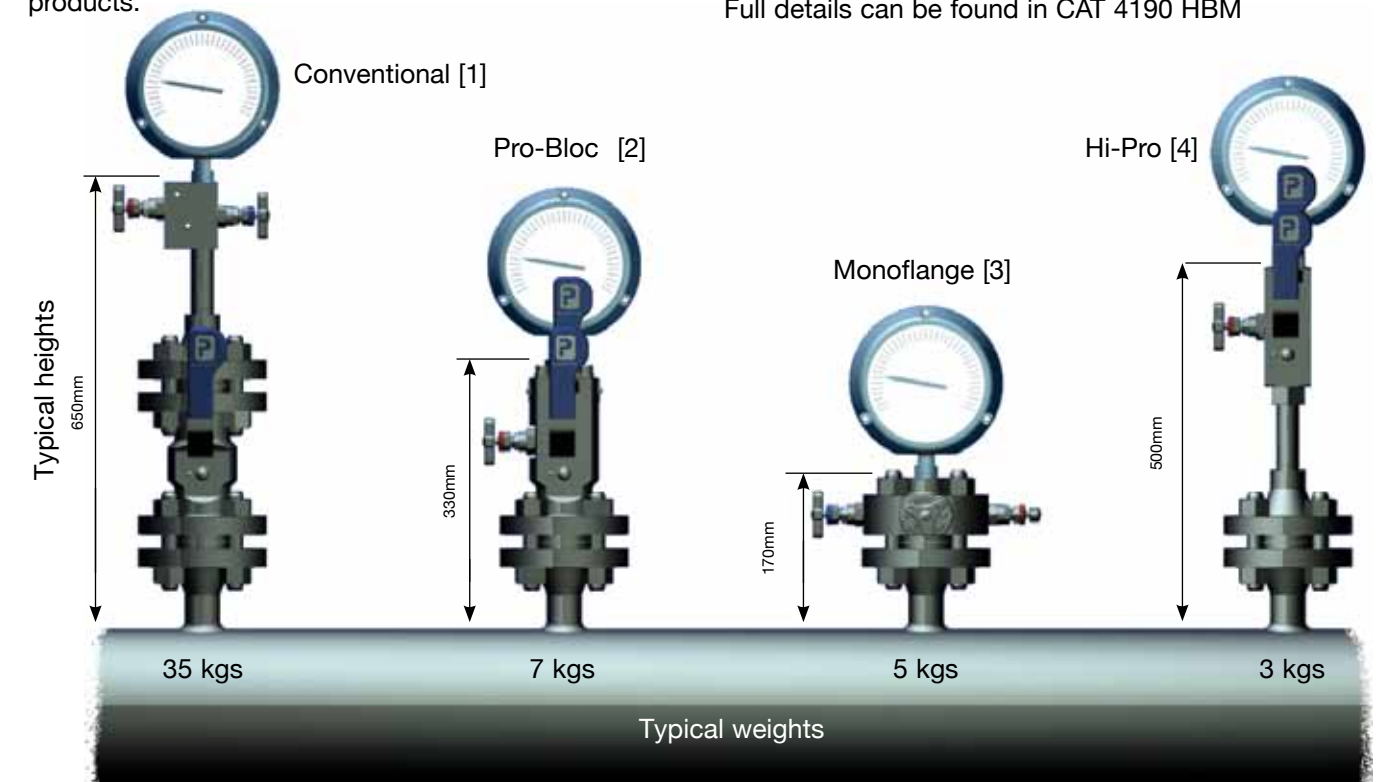



### Design codes

All Parker Hannifin double block and bleed designs comply with the following codes:

- ANSI/ASME B16.34 (Designed to meet the pressure and temperature requirements)
- ANSI/ASME B1.20.1 (Threads)
- ANSI/ASME B16.5 (Dimensions)
- BS6755 PART 2/API 607 (Fire safe designed to meet the requirements and verified by internal testing)
- ISO 15848 for Ultra-Low emissions
- B31.1

# Flanged Products

## Ball valve specification

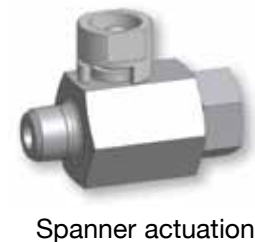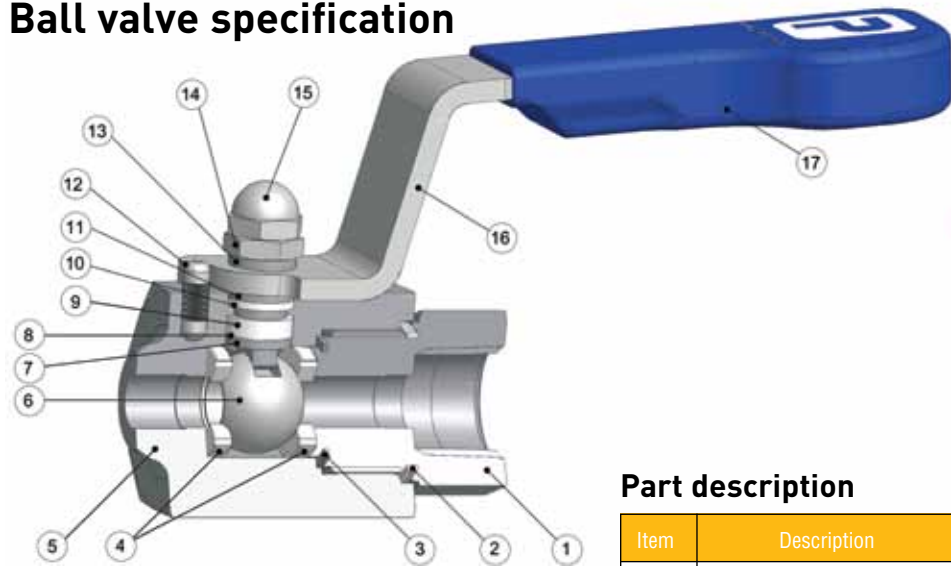

### Part description

Item	Description
1	End connector
2	E-seal™
3	Sealing washer
4	Seats
5	Body
6	Ball
7	Anti blowout stem
8	Thrust Seal
9	Gland packing
10	Upper gland packing
11	Thrust bush
12	Stop pin
13	Thrust bush
14	Lock nut
15	Locking dome nut
16	Handle
17	Handle grip

### Specifications

- 316 Stainless steel construction
  - Maximum cold working pressure rating 6,000 psig (414 barg) with P.T.F.E. seats\*
  - Temperature rating PTFE seats -54°C to +204°C (-65°F to +400°F)\*
  - Maximum cold working pressure rating 10,000 psig (689 barg) with PEEK seats\*
  - Temperature rating PEEK seats -54°C to +232°C (-65°F to +450°F)\*
- \*always refer to P/T graph

### Features

- Two piece body design - minimal leakage paths
- 4:1 Pressure boundary designed safety factor
- Designed to comply with requirements of ANSI/ASME B16.34 where applicable
- Bi-directional
- PEEK and PTFE standard ball seat materials
- PTFE and Graphoil gland packings
- Bubble tight shutoff.
- Floating ball principal with dynamic response seats featuring inherent self relief
- Anti blowout stem
- Integral compression ends available eliminating taper threads and thread sealants
- Low torque operation
- Quarter turn positive stop handle with ergonomically designed protective sleeve
- Full hydrostatic and low pressure air tested
- Connector thread environmentally sealed
- Anti static
- Firesafe designed to meet BS6755 Part 2/ API 607, (optional)


### Performance Data Pressure vs temperature

\* See catalogue 4190-HBV Hi-Pro Ball Valve for High Performance Process Isolation


⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 13.

# Flanged Products

## Outside screw and yoke (O.S.&Y.) needle valve

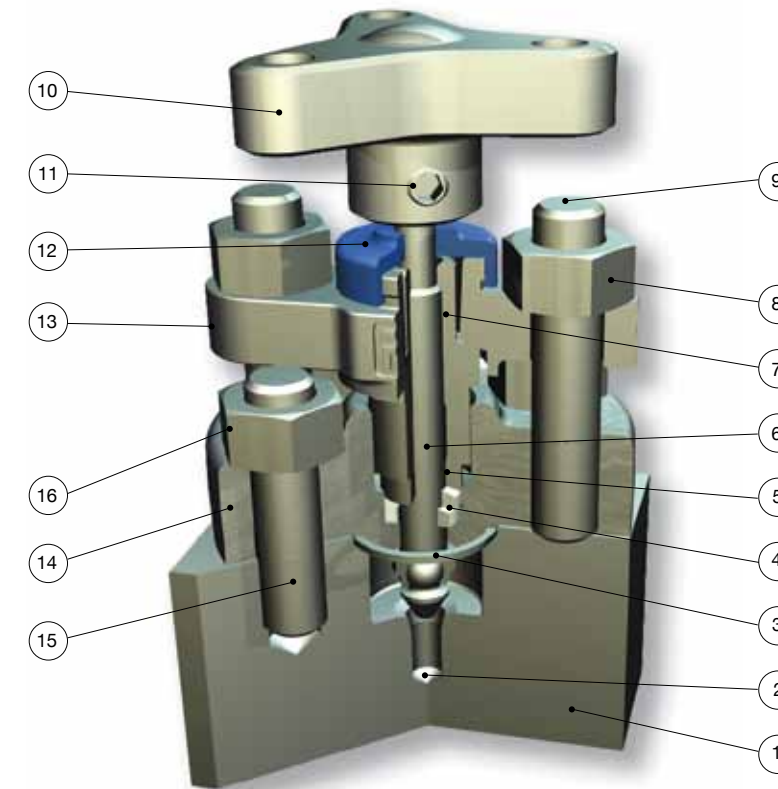

### Pressure vs temperature

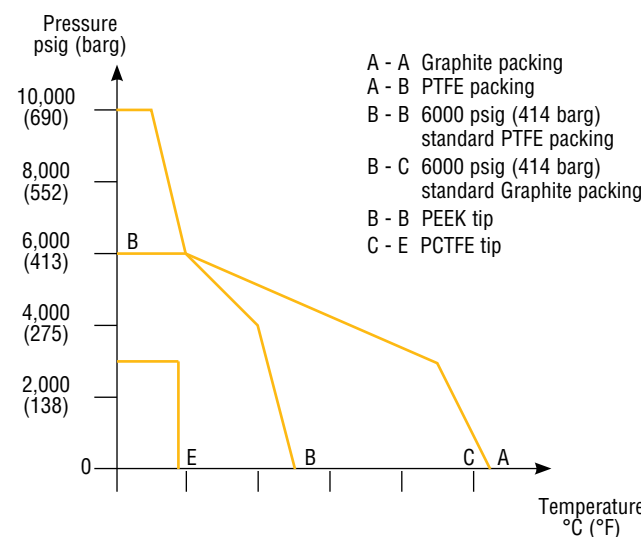

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 13.

### Features

- Externally adjustable gland
- P.T.F.E. or Graphite packing for bubble tight sealing
- Self centering crimped needle tip for bubble tight shut off and repeatability
- Available in 316, Monel, Duplex, Super Duplex, Hasteloy, Inconel, Incoloy, 6Mo, Carbon Steel, other materials on application
- Stainless steel as standard
- Optional wetted parts in a variety of exotic materials
- Firesafe certified to BS6755 part 2/ API 607
- Pressure rating up to 10,000 psig (690 barg)
- Temperature -54 C to 538 C (-65 F to 1000 F)
- Body to bonnet flange gasket for 100% atmospheric seal
- Back stopped spindle for blow out prevention, and minimum atmospheric leakage
- Rolled spindle operating threads
- Independent spindle thread bush with maximum female thread interface
- Colour coded close contact dust cap and function label for easy identification
- Optional: NACE compliance, heat code trace certification, oxygen clean


### Part description

Item	Description
1	Body
2	Tip
3	Joint seal
4	Packing
5	Thrust bush
6	Stem
7	Gland adjuster
8	Bridge nuts
9	Bonnet-bridge studding
10	Handle
11	Grub screw
12	Dust cap
13	Bridge
14	Bonnet
15	Body-bonnet studding
16	Stud nuts



# Flanged Products

## 'H' Series globe style needle valve

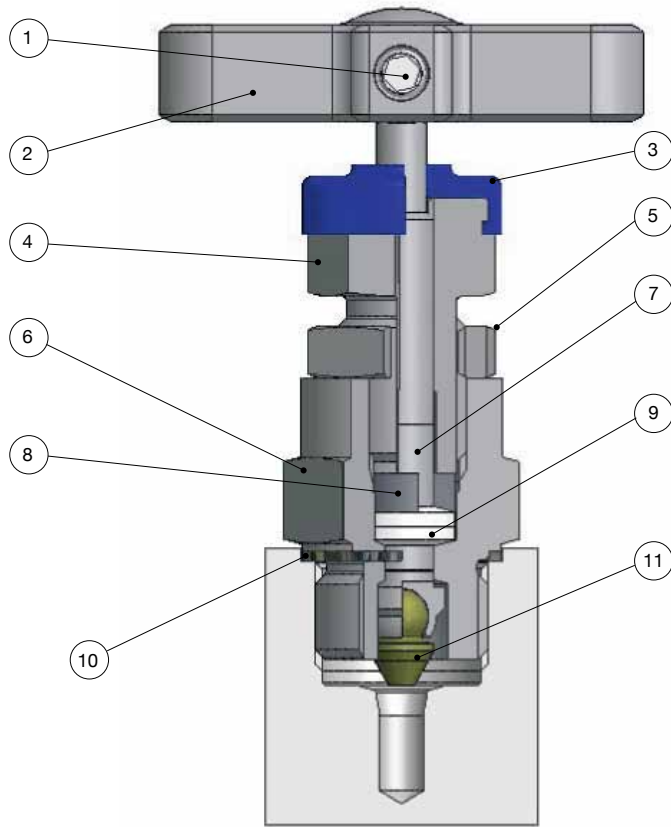

For safe, reliable and repeatable performance

### Part description


Item	Description
1	Positive handle retention
2	"T" bar
3	Dust Cap
4	Gland packing adjuster
5	Gland adjuster lock nut
6	Valve Bonnet
7	Anti blowout spindle
8	Thrust Bush
9	Gland packing (adjustable)
10	Bonnet/body washer
11	Spindle tip

### Features

- Rolled spindle operating threads for low torque operation
- Gland packing in PTFE or Graphite for bubble tight sealing
- Colour coded close contact dust cap and function label for easy identification
- Available in 316L, Monel, Duplex, Super Duplex, Hasteloy, Inconel, Incoloy, 6Mo, Titanium, other materials on application
- T-bar operating handle for low torque function
- Self centering crimped needle tip for bubble tight seat sealing
- Close contact dust cap for operating thread protection
- Back seated spindle for blow out prevention and minimum atmospheric leakage
- Adjustable gland with easy access
- Gland lock nut for vibration protection
- Pressure rating up to 10,000 psig (690 barg)
- Temperature rating -54 C to -538 C (-65 F to 1000 F)
- Optional bolted bonnet design available, firesafe certified
- Optional: NACE compliance, heat code trace certification, oxygen clean

Note: For ANSI/ASME B31.1 compliant products please see pages 12-15.

### Pressure vs temperature

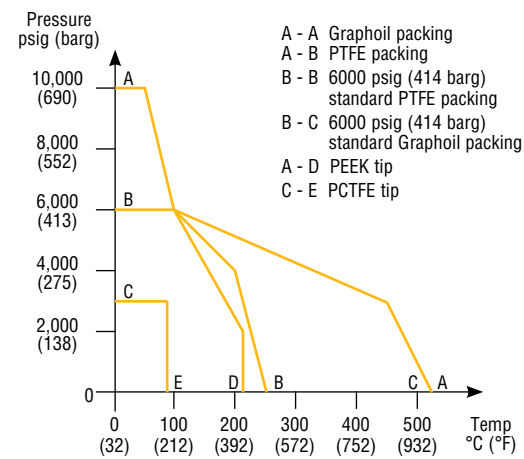

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 13.

# Flanged Products

## Anti-tamper spindle



For key only - part no. ATHKEY/1


Retro-fit kit part number  
KITAT without key  
KITATK with key

## T bar handle locking



Retro-fit kit part number KITTHL

## Bolted bonnet inside screw

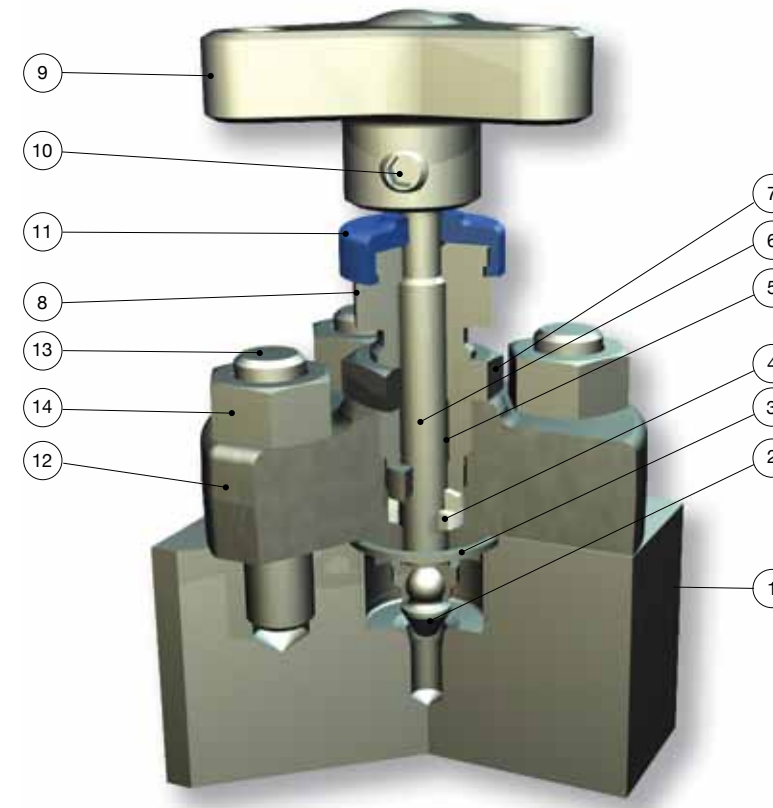

Not available on Low Emission valves

### Part description

Item	Description
1	Body
2	Tip
3	Joint seal
4	Packing
5	Thrust bush
6	Stem
7	Nut
8	Gland adjuster
9	Handle
10	Grub screw
11	Dust cap
12	Bonnet
13	Body-bonnet studding
14	Stud nuts

# Flanged Products

## Monoflange (MF) manifolds


### Purpose

This manifold range is designed to replace conventional multiple-valve installations currently in use for interface with pressure measuring systems. By combining customer specified valves into a single manifold, the number of leak paths is considerably reduced and the mass of the system is lowered reducing the stresses from loading and vibration. The result of which substantially improves installation and operational safety factors. Reduction in leakage path connections together with a one-piece solution also provides positive installation cost savings. Suitable for Ultra-Low Emission requirements.



### Key advantages of Parker Monoflanges

- Strong construction produced from one piece grain flow controlled forged body
- Various flow and valve configurations available allowing true flexibility to meet all customer requirements
- Variety of flange sizes and outlet connections
- Standard materials of Carbon Steel A105, Low Temperature Carbon Steel A350 LF2, Stainless Steel A182-F316 and Duplex Stainless Steel A182-F51
- Optional materials include Super Duplex, Monel, Hastelloy, 6Mo, Incoloy 625
- Incorporation of standard H series needle valve technology and state of the art O.S.&Y. design
- 4mm Needle valve orifice
- Ergonomically designed operating handles with low torque function
- Full range of customer retro fit handle options
- User friendly part number and specification construction system
- Customised designs welcome
- Available to meet ISO 15848, Class A

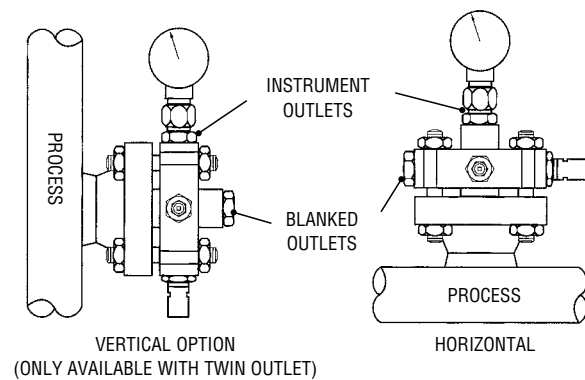

### Instrument outlet connections

One of the unique features Parker can offer users which can further enhance safety factors is the incorporation of single or twin ferrule compression fittings as an integral part of the outlet connection.


Installation of the instrument which require remote positioning will be interconnected using conventional tube and fittings, whilst NPT taper threads are accepted as a standard their use involves some form of thread sealant which adds to the complication of instrument performance through contamination within the system.

Avoiding these taper thread connections wherever possible reduces this contaminant risk and Parker, being a leading manufacturer of compression type of fittings (which requires no sealant mediums), can incorporate them in the outlet connection, totally eliminating the contamination risk.

# Flanged Products

## Monoflange features

- 1/2 to 2 N.B. Flanges (15 to 50 DN)
- ANSI B16.5 150 to 2500 flange class and API 10,000
- 1/2-14 NPT (female) standard outlet
- 1/4-18 NPT (female) standard vent
- Variety of optional end connection sizes and thread forms including tube connections 1/2 /12mm diameter
- Standard materials of construction: Stainless steel ASTM A182 F316/F316L, Carbon steel ASTM A350 LF2/A105, Duplex ASTM A182 F51
- Optional materials include Super Duplex, Monel, Hastelloy, 6Mo, Incoloy
- Combined needle and O.S.&Y. valves available
- Instrument connections A-LOK inverted available
- Raised face and ring type joint flange face styles
- One-piece forged construction flange as standard
- H needle design with retro fit handle options
- Optional fire safe designed (and tested) to meet BS6755 part 2/API 607
- Pressure boundary designs calculated to ASME VIII Div. 1 and verified by testing
- 4:1 Factor of Safety
- Heat code traceable material to EN10204.3.1
- Bubble tight shut off valve seats 17-4 PH tips standard
- Optional PEEK tips available
- Colour coded functional valves
- Optional locking and anti tamper devices for all valve types available
- NACE MR 0175/ISO 15156 compliant material available on request
- Permanent marked body with full order and specification details
- Available with various non-threaded connections, please contact us

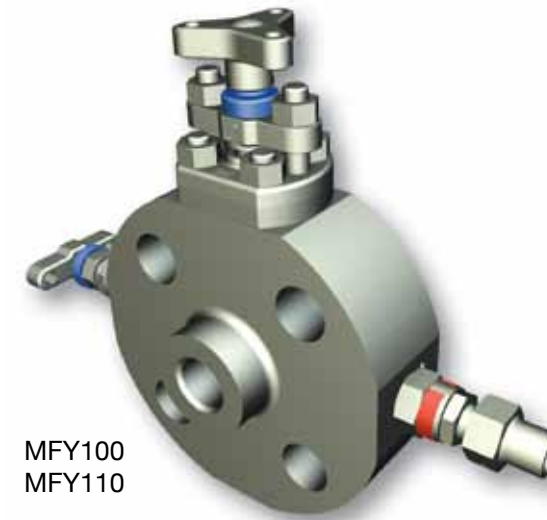

MFY100  
MFY110



MFY140



MFH100  
MFH110

### Standard specification:

Outlet - 1/2 FNPT  
Vent - plugged 1/4 FNPT  
Seat - metal to metal  
Packing - PTFE



# Flanged Products

## Monoflange (MF) manifold selection and part number construction - made easy

Select the style of Monoflange from the choice of arrangements below noting the complete MF reference.  
If the style or arrangement is not shown below please provide full description and specification.

	<b>Block bleed block</b> 1st Isolate: Needle 2nd Isolate: Needle Vent: Needle	<b>MFH100</b>		<b>Block bleed block</b> 1st Isolate: O.S.&Y. 2nd Isolate: Needle Vent: Needle	<b>MFY100</b>
	<b>Block block bleed</b> 1st Isolate: Needle 2nd Isolate: Needle Vent: Needle	<b>MFH110</b>		<b>Block block bleed</b> 1st Isolate: O.S.&Y. 2nd Isolate: Needle Vent: Needle	<b>MFY110</b>
	<b>Block &amp; bleed</b> 1st Isolate: Needle Vent: Needle	<b>MFH120</b>		<b>Block &amp; bleed</b> 1st Isolate: O.S.&Y. Vent: Needle	<b>MFY120</b>
	<b>Block &amp; bleed</b> 1st Isolate: Needle Vent: Needle	<b>MFH130</b>		<b>Block &amp; bleed</b> 1st Isolate: O.S.&Y. Vent: Needle	<b>MFY130</b>
	<b>Double block</b> 1st Isolate: Needle 2nd Isolate: Needle	<b>MFH140</b>		<b>Double block</b> 1st Isolate: O.S.&Y. 2nd Isolate: Needle	<b>MFY140</b>
	<b>Single block</b> 1st Isolate: Needle	<b>MFH150</b>		<b>Single block</b> 1st Isolate: O.S.&Y.	<b>MFY150</b>

◆ For dual outlets specify MF\*105. ▲ For dual outlets specify MF\*115.  
For flange to flange variants replace MF\*1\*\* with MF\*2\*\*.  
For bleed port only specify MF\*160.  
Please note vent valve is not anti-tamper as standard.

# Flanged Products

**Example** MFY100 B 32T2500 A3 F

**1. Monoflange part number**  
Insert from page 10

**2. Material**  
**A** Carbon Steel ASTM A105  
**B** Stainless Steel ASTM A182-F316  
**D** Monel M400  
**E** Duplex ASTM A182-F51  
**F** Super Duplex ASTM A182-F53/F55  
**G** Hastelloy C-276  
**H** Low Temp. C. St. ASTM A350 LF2  
**K** 6Mo  
**M** Inconel 625

**3. Flange details**

Flange Size	Flange Face Style	Flange Class
8 = 1/2	F = Raised Face Spiral	150 = 150
12 = 3/4	T = Ring Type Joint	300 = 300
16 = 1		600 = 600
24 = 1 1/2		900 = 900
32 = 2		1500 = 1500
API } specify separately		2500 = 2500
DIN } see page 20		*136 = 150/300/600
*1/2 flange size only		

**4. Outlet style (1/2" FNPT is standard NO part designator needed)**

Size	Connection Style
4 = 1/4	F = Female NPT Thread
6 = 3/8	M = Male NPT Thread
8 = 1/2	A = A-LOK (inverted only)
M6 = 6mm	G = Swivel gauge adaptor 1/2 NPTF (fitted)
M10 = 10mm	
M12 = 12mm	

**5. Plugged vent (1/4" FNPT is standard NO part designator needed)**

Size
V6 = 3/8 FNPT
V8 = 1/2 FNPT

**6. Valve packing and seat materials**

- \* PTFE Packing
- \* Needle tip 17-4PH St. St.
- 3 Graphoil (fitted as standard when fire safe design is specified)
- PN PEEK Needle tip all valves (non fire safe only)
- \* fitted as standard no part NO designator required.

**7. Valve handle operating options**

- A\* Anti tamper
- L\* Padlock handle locking
- R\* Regulating tip ( H series needle valve only)
- Y\* O.S.&Y. valves

\* Insert valve number 1 = primary, 2 = secondary, 3 = vent, 4 = all. Padlocks not supplied

**8. Condition**

- F Firesafe design (primary only - O.S.&Y. needle valve)
- N NACE

Combine designators as required

Please Note:  
Certification requirements and customer specifications MUST be provided at enquiry and order stage.

**IMPORTANT NOTES**

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 27.

All non wetted parts will be supplied in standard stainless steel for exotic materials. For carbon steel construction trim materials will be supplied in stainless steel.

Ring type joints (T) CANNOT be supplied for 1/2 & 3/4 class 150 flanges.

St. St. grades 302 and 304 are NOT used in the construction of any of these products.

For customer specific options not covered here engineering will allocate a part number at quotation stage.

Certification requirements and customer specifications MUST be provided at enquiry and order stage.


For API flange requirements full details must be specified separately.

Part number example MFY100B32T2500A3F Monoflange - Double Block and Bleed - Block (O.S.&Y.) Bleed (Needle) Block (Needle) (MFY100) - 316 St. St. construction (B) - 2 Pipe flange, Ring type joint, class 2500 (32T2500) - 1/2 female NPT outlet - 1/4 Female NPT vent - Anti-tamper vent (A3) - Firesafe design and certified (F), valves fitted with PTFE packing, metal seated 17-4PH st.st. tips.

## Monoflange manifolds compliant with ANSI B31.1

### Purpose

This manifold range is designed to replace conventional multiple-valve installations currently in use for interface with pressure measuring systems. By combining customer specified valves into a single manifold, the number of leak paths is considerably reduced and the mass of the system is lowered reducing the stresses from loading and vibration. The result of which substantially improves installation and operational safety factors. Reduction in leakage path connections together with a one-piece solution also provides positive installation cost savings.

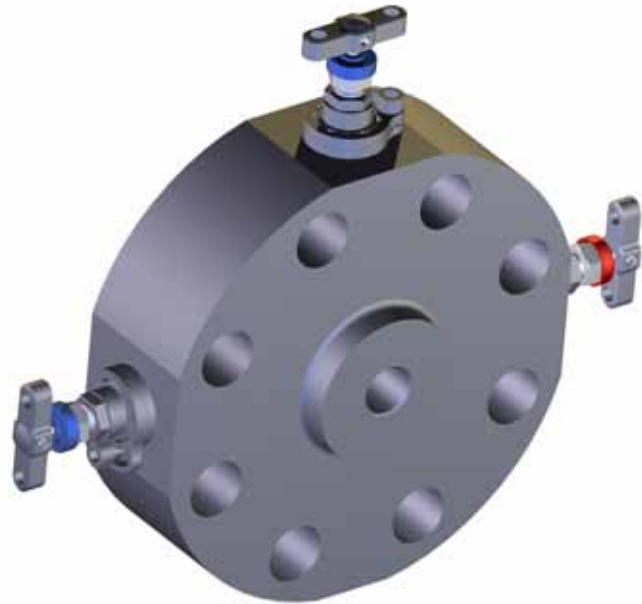

### Key advantages of Parker Monoflanges


- Strong construction produced from one piece grain flow controlled forged body
- Various flow and valve configurations available allowing true flexibility to meet all customer requirements
- Variety of flange sizes and outlet connections
- Incorporation of HPP series needle valve technology
- 4mm Needle valve orifice
- Ergonomically designed operating handles with low torque function
- Full range of customer retro fit handle options
- User friendly part number and specification construction system
- Customised designs welcome

### Instrument outlet connections

One of the unique features Parker can offer users which can further enhance safety factors is the incorporation of single or twin ferrule compression fittings as an integral part of the outlet connection.

Installation of the instrument which require remote positioning will be interconnected using conventional tube and fittings, whilst NPT taper threads are accepted as a standard their use involves some form of thread sealant which adds to the complication of instrument performance through contamination within the system.

Avoiding these taper thread connections wherever possible reduces this contaminant risk and Parker, being a leading manufacturer of compression type of fittings (which requires no sealant mediums), can incorporate them in the outlet connection, totally eliminating the contamination risk.

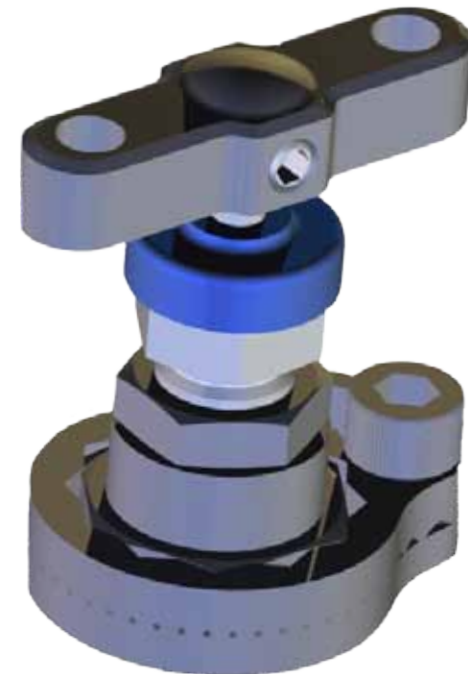

### Monoflange features

- 1/2 to 2 N.B. Flanges (15 to 50 DN)
- ANSI B16.5 150 to 2500 flange class
- 1/2-14 NPT (female) standard outlet
- 1/4-18 NPT (female) standard vent
- Variety of optional end connection sizes and thread forms including tube connections 1/2 /12mm diameter
- Standard materials of construction: Stainless steel ASTM A182 F316/F316L, Carbon steel ASTM A350 LF2/A105
- Instrument connections A-LOK inverted available
- Raised face and ring type joint flange face styles
- One-piece forged construction flange as standard
- Graphite packing to meet full pressure/temperature requirements of ANSI B31.1 materials
- Pressure boundary designs calculated to ANSI B31.1
- 4:1 Factor of Safety

- Heat code traceable material to EN10204.3.1
- Bubble tight shut off valve seats 17-4 PH tips standard
- Colour coded functional valves
- Optional locking and anti tamper devices for all valve types available
- NACE MR 0175/ISO 15156 compliant material available on request
- Permanent marked body with full order and specification details
- Available with various non-threaded connections, please contact us

### Standard specification:


Outlet - 1/2 FNPT  
Vent - plugged 1/4 FNPT  
Seat - metal to metal  
Packing - PTFE

### Features

- All valves are graphite packed for high temperature service
- Non rotating, hard stem tip with metal to metal seating for bubble tight shut-off
- Back seat design
- Blow-out proof stem
- Pressures & temperatures in accordance with ASME class 2500
- Patented Tru-Lok safety bonnet locking device prevents accidental removal
- Standard orifice 4mm (Cv 0.35)

### Specific pressure / temperature performance

**316 SS** 6000 psig @ 100 F (414 bar @ 38 C)  
2915 psig @ 1000 F (201 bar @ 538 C)

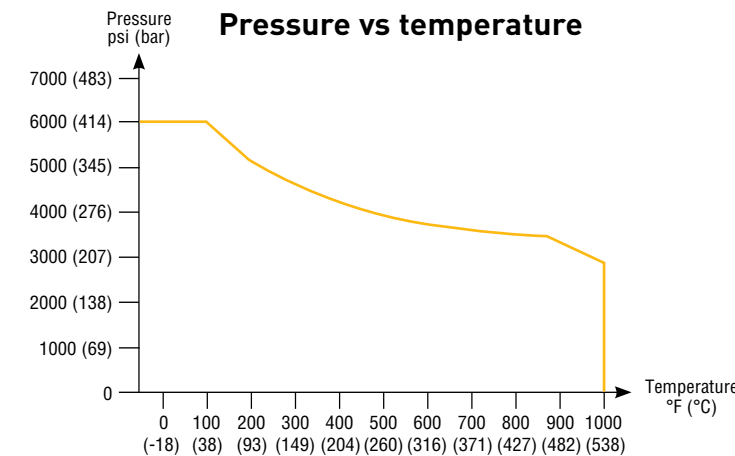

⚠ When selecting products for specific applications users should refer to our notice below.

### WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

### Offer of Sale







The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any Order accepted by Parker Hannifin will be subject to our terms and conditions of sale, copy available on request.



# Flanged Products

## ANSI B31.1 compliant manifold selection and part number construction - made easy

Select the style of Monoflange from the choice of arrangements below noting the complete reference. If the style or arrangement is not shown below please provide full description and specification.

 <p><b>Block bleed block</b> 1st Isolate: Needle 2nd Isolate: Needle Vent: Needle</p> <p><b>PPMFH100</b></p>	 <p><b>Block &amp; bleed</b> 1st Isolate: Needle Vent: Needle</p> <p><b>PPMFH130</b></p>
 <p><b>Block block bleed</b> 1st Isolate: Needle 2nd Isolate: Needle Vent: Needle</p> <p><b>PPMFH110</b></p>	 <p><b>Double block</b> 1st Isolate: Needle 2nd Isolate: Needle</p> <p><b>PPMFH140</b></p>
 <p><b>Block &amp; bleed</b> 1st Isolate: Needle Vent: Needle</p> <p><b>PPMFH120</b></p>	 <p><b>Single block</b> 1st Isolate: Needle</p> <p><b>PPMFH150</b></p>

◆ For dual outlets specify PPMFH105. ▲ For dual outlets specify PPMFH115.  
For flange to flange variants replace PPMFH1\*\* with PPMFH2\*\*.  
For bleed port only specify PPMFH160.  
Please note vent valve is not anti-tamper as standard.

# Flanged Products

**Example PPMFH100 B 32T2500 3 A3 N**

**1. Monoflange part number**  
Insert from page 14

**2. Material**  
**A** Carbon Steel ASTM A105  
**B** Stainless Steel ASTM A182-F316  
**G** Hastelloy C-276  
**H** Low Temp. C. St. ASTM A350 LF2

**3. Flange details**

Flange Size	Flange Face Style	Flange Class
8 = 1/2	F = Raised Face Spiral	150 = 150
12 = 3/4	T = Ring Type Joint	300 = 300
16 = 1		600 = 600
24 = 1 1/2		900 = 900
32 = 2		1500 = 1500
API } specify separately		2500 = 2500
DIN } see page 20		136 = 150/300/600
*1/2 flange size only		

**4. Outlet style (1/2" FNPT is standard NO part designator needed)**

Size	Connection Style
4 = 1/4	F = Female NPT Thread
6 = 3/8	M = Male NPT Thread
8 = 1/2	A = A-LOK (inverted only)
M6 = 6mm	G = Swivel gauge
M10 = 10mm	adaptor 1/2
M12 = 12mm	NPTF (fitted)

**5. Plugged vent (1/4" FNPT is standard NO part designator needed)**

Size
V6 = 3/8 FNPT
V8 = 1/2 FNPT

**6. Valve packing**  
3 Graphoil (standard)

**7. Valve handle operating options**  
**A\*** Anti tamper  
**L\*** Padlock handle locking  
**R\*** Regulating tip ( H series needle valve only)  
 \* Insert valve number 1 = primary, 2 = secondary, 3 = vent, 4 = all. Padlocks not supplied

**8. Condition**  
**N** NACE  
 Combine designators as required  
 Please Note:  
 Certification requirements and customer specifications MUST be provided at enquiry and order stage.

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 27.

### IMPORTANT NOTES

All non wetted parts will be supplied in standard stainless steel for exotic materials. For carbon steel construction trim materials will be supplied in stainless steel.

Ring type joints (T) CANNOT be supplied for 1/2 & 3/4 class 150 flanges.

St. St. grades 302 and 304 are NOT used in the construction of any of these products.

For customer specific options not covered here engineering will allocate a part number at quotation stage.

Certification requirements and customer specifications MUST be provided at enquiry and order stage.

Part number example PPMFH100B32T2500A3 Monoflange - Double Block and Bleed - Block (Needle) Bleed (Needle) Block (Needle) (PPMFH100) - 316 St. St. construction (B) - 2 Pipe flange, Ring type joint, class 2500 (32T2500) - 1/2 female NPT outlet - 1/4 Female NPT vent - Graphite Packing (3) Anti-tamper vent (A3) metal seated 17-4PH st.st. tips.



## Flanged Products

### Pro-Bloc® (PB) Manifolds

#### Purpose

This manifold range is designed to replace conventional multiple-valve installations currently in use for interface with pressure measuring systems. By combining customer specified valves into a single manifold, the number of leak paths is considerably reduced and the mass of the system is lowered reducing the stresses from loading and vibration. The result of which substantially improves installation and operational safety factors. Reduction in leakage path connections together with a one-piece solution also provides positive installation cost savings.



#### Key advantages of Parker Pro-Bloc®

- Strong construction produced from one piece grain flow controlled forged body
- Various flow and valve configurations available allowing true flexibility to meet all customer requirements
- Single flange, double flange or triple flange configurations available
- Standard materials of Carbon Steel A105, Low Temperature Carbon Steel A350 LF2, Stainless Steel A182-F316 and Duplex Stainless Steel A182-F51
- Optional materials include Super Duplex, Monel, Hastelloy, 6Mo, Incoloy 625
- Incorporation of standard Hi-Pro ball valve and H series needle valve technology
- 10mm/15mm/20mm/25mm full bore valve design
- Ergonomically designed operating handles with low torque function
- User friendly part number and specification construction system
- Optional integral A-LOK /CPI outlet connection
- Parker Tru-loc (patent pending) safety system



#### Tru-Loc™

##### Mechanical Sealed End Connection

Designed specifically for Pro-Bloc end connection security. Extensive tests have proved that end connections locked with the Tru-Loc™ (PP) end connector locking mechanism give 100% security and prevent end connector movement when disconnecting instruments or connectors. This ensures that the Ball Seat is securely positioned at all times.

#### Instrument outlet connections

One of the unique features Parker can offer users which can further enhance safety factors is the incorporation of single or twin ferrule compression fittings as an integral part of the outlet connection. Installation of the instrument which require remote positioning will be interconnected using conventional tube and compression fittings, whilst NPT taper threads are accepted as a standard their use involves some form of thread sealant which adds to the complication of instrument performance through contamination within the system. Avoiding these taper thread connections wherever possible reduces this contaminant risk and Parker, being a leading manufacturer of compression type of fittings (which requires no sealant mediums), can incorporate them in the outlet connection, totally eliminating the contamination risk.

## Flanged Products

#### Pro-Bloc® features

- 1/2 to 3 N.B. Flanges (15 to 50 DN)
- ANSI B16.5 150 to 2500 flange class and API 10,000
- 10mm/15mm/20mm/25mm full bore valve design
- 1/2 -14 to 1 -11.5 NPT (female) standard outlet (depending on bore size)
- 1/2 NPT (female) standard vent
- Variety of optional end connection sizes and thread forms including tube connections up to 1 /25mm diameter (depending on bore size)
- Standard materials of construction: Stainless steel ASTM A182 F316/F316L, Carbon steel ASTM A350 LF2/A105, Duplex ASTM A182 F51
- Optional materials on request
- Instrument connections A-LOK /CPI available
- Raised face and ring type joint flange face styles
- One-piece forged construction flange as standard
- Optional fire safe designed (and tested) to meet BS 6755 Part 2/API 607
- 316 stainless steel handles and trim as standard to reduce the risk of corrosion
- Designed to meet the pressure and temperature requirements of ASME/ANSI B16.34/B16.5
- Pressure boundary designs calculated to ASME VIII Div 1 and verified by testing
- 4:1 Factor of Safety
- Heat code traceable material to EN10204.3.1
- Bubble tight shut off
- Colour coded functional valves
- Optional locking and anti tamper devices for all valve types available
- Positive lever stop
- NACE MR 0175/ISO 15156 compliance available on request
- Large user friendly handles
- Permanent affixed reference label
- O.S.&Y. and H series needle valves can be combined with ball valves




PB\*100



PB\*120



PB\*160

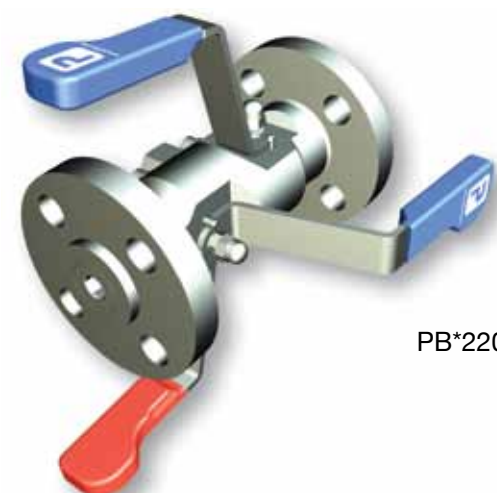





PB\*220

Standard specification flange x screw:  
 Outlet - FNPT; Vent - 1/2 FNPT plugged;  
 Ball seats. P.T.F.E.; Needle seats, metal/metal  
 17-4 PH St. St.; P.T.F.E. packing all valves.








# Flanged Products


**Pro-Bloc® (PB) manifold selection and part number construction - made easy**  
 Select the style of Pro-Bloc® from the choice of arrangements below noting the complete **PB reference**.

## Style

	<b>Single piece forging flange x screw</b>		<b>Single piece forging flange x flange</b>
	<b>PB*1**</b>		<b>PB*2**</b>
	<b>Modular construction flange x screw</b>		<b>Modular construction flange x flange</b>
	<b>PB*5**</b>		<b>PB*6**</b>

## Arrangement

	<b>Block bleed block</b> 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle		<b>Block bleed block</b> 1st Isolate: Ball 2nd Isolate: Needle Vent: Needle
	<b>PB**00</b>		<b>PBY*10</b>
	<b>Block bleed block</b> 1st Isolate: Ball 2nd Isolate: Ball Vent: Ball		<b>Block &amp; bleed</b> 1st Isolate: Ball Vent: Needle
	<b>PB**20</b>		<b>PB**30</b>
	<b>Block &amp; bleed</b> 1st Isolate: Ball Vent: Ball		<b>Double block</b> 1st Isolate: Ball 2nd Isolate: Needle
	<b>PB**40</b>		<b>PBY*50</b>
	<b>Double block</b> 1st Isolate: Ball 2nd Isolate: Ball		
	<b>PB**60</b>		

● Only available with 10mm bore ball valve.  
 Single isolate.  specify PB\*165, PB\*265.

# Flanged Products

**Example PB Y 1 00 B 32T2500 F**

**1. Ball valve bore size**  
 Y = 10mm  
 X = 15mm  
 W = 20mm  
 V = 25mm

For style see page 18 section 'Style'

For arrangement see page 18 section 'Arrangement'

**2. Material**  
 A Carbon Steel ASTM A105  
 B Stainless Steel ASTM A182-F316  
 D Monel M400  
 E Duplex ASTM A182-F51  
 F Super Duplex ASTM A182-F53/F55  
 G Hastelloy C-276  
 H Low Temp. C. St. ASTM A350 LF2  
 K 6Mo  
 L 825  
 M Inconel 625

Flange Size	Flange Face Style	Flange Class
½ = 1/2	F = Raised Face Spiral	150 = 150
¾ = 3/4	T = Ring Type Joint	300 = 300
1 = 1		600 = 600
1 ½ = 1 1/2		900 = 900
2 = 2		1500 = 1500
3 = 3 (25mm bore only)		2500 = 2500

API } specify separately  
 DIN } See page 20 à Certain flange/bore size combinations not available - consult factory

**3. Flange details**

**4. Outlet style (each bore size has its own standard size female NPT outlet - the standard does not require this field to be completed)**

**Standard outlets (female NPT)**  
 10mm bore = 1/2  
 15mm bore = 1/2  
 20mm bore = 3/4  
 25mm bore = 1  
 For optional outlets see page 20

**5. Plugged vent (1/2" NPTF as standard NO part designator needed)**

**6. Packing, seat and construction options**

- \* PTFE Packing
- \* PTFE Ball seats
- \* Needle tip 17-4PH St. St.
- PK** PEEK Ball and needle seating
- PB** PEEK Ball seats
- PN** PEEK Needle tip (non firesafe only)
- BC** Bolted construction connection

\* fitted as standard no part NO designator required.

**7. Valve handle operating options**

- A\*** Anti tamper (Needle Valve only)
- L\*** Padlock handle locking
- R\*** Regulating tip ( H series Needle Valve only)
- S\*** Spanner actuated (Ball Valve only)
- Y\*** O.S.&Y. Needle Valve

\* Insert valve number 1 = primary, 2 = secondary, 3 = vent, 4 = all.  
 Padlocks not supplied  
 Note: Firesafe needle valve with locking device NOT available

**8. Condition**

- F** Firesafe design
- N** NACE

Combine designators as required

Please Note:  
 Certification requirements and customer specifications MUST be provided at enquiry and order stage.



# Flanged Products

Other flange detail options  
(reference Box 3 flange details  
pages 11, 15, 19, 29 & 31)

3. Flange details API 6A / ISO 10423* (Dimensionally compliant only)	
Flange Size	Flange Rating
29 = 1 13/16	2K = 2000 psig
33 = 2 1/16	3K = 3000 psig
41 = 2 9/16	5K = 5000 psig
	10K = 10000 psig (not available for  Ultra-Low emission products).

\* Only available with 10mm bore (PBY) and Monoflange products.

3. Flange details DIN	
Flange Size	Flange Class
DN10	PN6
DN15	PN10
DN20	PN16
DN25	PN40
DN32	PN100
DN40	
DN50	

Other outlet options  
(reference Box 4 outlet style pages  
11, 15, 19, 29 & 31)

4. Optional outlets	Connection Style
<b>Size</b>	
4 = 1/4	F = Female NPT
6 = 3/8	M = Male NPT
8 = 1/2	A = A-LOK
10 = 5/8	Z = CPI
12 = 3/4	G = Swivel gauge adaptor
14 = 7/8	1/2 Female NPT (fitted)
16 = 1	
<b>M6 = 6mm</b>	
<b>M10 = 10mm</b>	
<b>M12 = 12mm</b>	
<b>M14 = 14mm</b>	
<b>M15 = 15mm</b>	
<b>M16 = 16mm</b>	
<b>M18 = 18mm</b>	
<b>M20 = 20mm</b>	
<b>M22 = 22mm</b>	
<b>M25 = 25mm</b>	

Note: Contact factory for bore size/outlet connection combinations

When selecting products for specific applications users should refer to our notice at the bottom of page 19.

**IMPORTANT NOTES**

All non wetted parts will be supplied in standard stainless steel for exotic materials. For carbon steel construction trim materials will be supplied in stainless steel.

For flange to flange construction when the required flanges are different sizes then specify both sizes in section 3 example: 1st flange 1 pipe (16), raised face (F), class 900 (900), 2nd flange 1/2 (8), raised face (F), class 900 (900) insert: 16F9008F900. Consult factory for available combinations.

Ring type joints (T) CANNOT be supplied for 1/2 & 3/4 class 150 flanges.

St. St. grades 302 and 304 are NOT used in the construction of any of these products.

For customer specific options not covered here engineering will allocate a part number at quotation stage.

Certification requirements and customer specifications MUST be provided at enquiry and order stage.

For API flange requirements full details must be specified separately.


Part number example FEPBY100B32T2500F Ultra-Low Emission Pro-Bloc - Flange by screw - Double Block and Bleed - Block (Ball) Bleed (Needle) Block (Ball) (FEPBY100) - 316 St. St. construction (B) - 2 Pipe flange, Ring type joint, class 2500 (32T2500) - 1/2 female NPT outlet - 1/2 Female NPT vent - Firesafe design and certified (F), all valves PTFE packed, ball seats PTFE, needle valve metal seated 17-4PH st.st. tips.

# Flanged Products

## Pro-Bloc® (PB) Manifolds

### Pro-Bloc® for sampling applications (10mm + 15mm bore only)


This manifold range is designed to replace conventional multiple-valve installations where sampling of the process stream is required. This design has been developed to remove a sample directly from the process stream at full system pressure. All of the options and configurations shown within the standard Pro-Bloc® range can be offered for sampling service by the addition of a customised sampling probe which extends from the pipe flange into the process stream. Also available to suit ISO15848 Class A Ultra-Low emission standard.

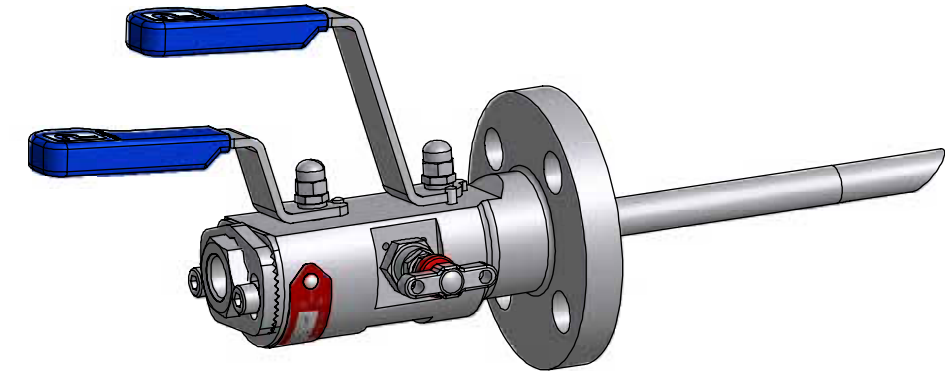

### Pro-Bloc® for sampling applications - part numbering

In order to specify the addition of a sampling probe to your Pro-Bloc simply add an S to the beginning of the part number i.e. SPB or FESPB The probe length in mm must be added to the end of the part number, see below. Due to the internal bore size of standard ASME flanges probes can only be installed on a range of flanges - please see the attached table.

Bore	Flange range
10mm	Size 1" and above, ASME flanges up to class 2500.
15mm	Size 1 1/2" and above, ASME flanges up to class 2500.
20mm	Not available
25mm	Not available

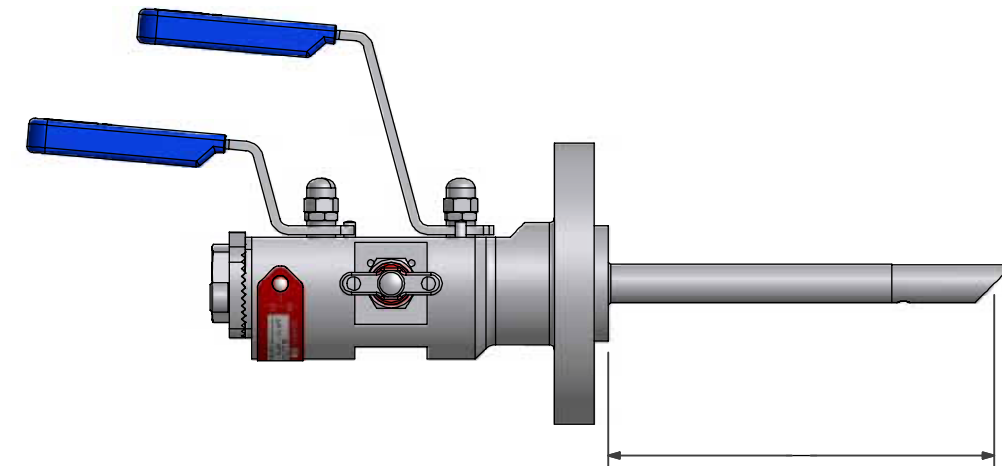


The probe length must be specified from the raised face to the end of the probe in mm, to the nearest mm. Probes are supplied to suit the insertion length required by the pipeline and thus must be specified by the customer.

A wide variety of end preparations and support collars are available on request. Probe strength wake frequency calculations can be carried out against pipeline flow rates on request. In the event of the required valve configuration not be shown please do not hesitate to contact the factory as Parker Hannifin IPD offer bespoke customer solutions.

## Pro-Bloc® (PB) Manifolds

### Pro-Bloc® for injection applications (10mm + 15mm bore only)

This manifold range is designed to replace conventional multiple-valve installations where injection into the process stream is required. This design has been developed to inject directly into the process stream at full system pressure. All of the options and configurations shown within the standard Pro-Bloc® range can be offered for injection service by the addition of a customised injection probe which extends from the pipe flange into the process stream. Pro-Bloc® s for injection applications include an injection probe which enables the fluid to be injected directly into the process stream and a high integrity full bore non-return valve to eliminate the risk of back flow out of the process stream. Also available to meet ISO15848 Class A Ultra-Low emission standard.

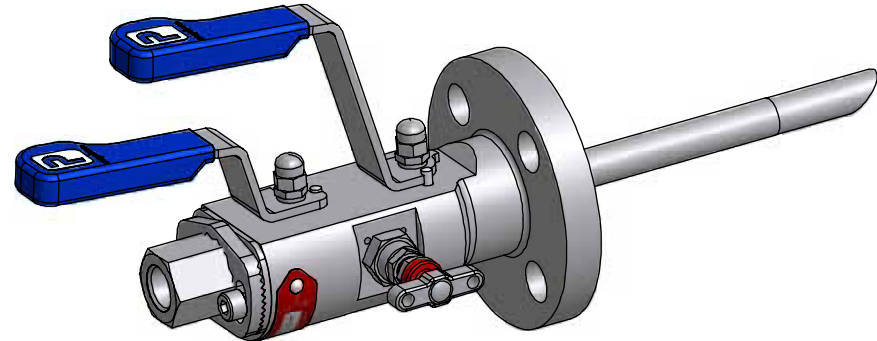

### Pro-Bloc® for injection applications - part numbering


In order to specify the addition of an injection probe and non-return valve to your Pro-Bloc® simply add a J to the beginning of the part number i.e. JPB or FEJPB. The probe length in mm must be added to the end of the part number, see below. Due to the internal bore size of standard ASME flanges probes can only be installed on a range of flanges - please see the table in the sampling Pro-Bloc® section (previous page).

The probe length must be specified from the raised face to the end of the probe in mm, to the nearest mm.

Probes are supplied to suit the insertion length required by the pipeline and thus must be specified by the customer.

A wide variety of end preparations and support collars are available on request.

Probe strength wake frequency calculations can be carried out against pipeline flow rates on request.

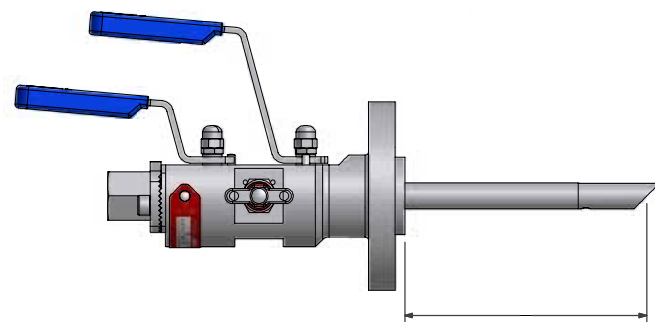


### Hi-Check non-return valve

This high integrity full bore non-return valve eliminates the risk of back flow out of the process stream. The design utilises a spring loaded poppet to ensure leak proof performance. The Hi-Check Non Return Valve is designed for higher flow and low pressure drop across the valve - having a larger through bore than most other manufacturers equivalent product.

As standard a viton seal will be supplied with a crack pressure of 10 psig. A wide variety of seat materials and crack pressures are available on request.

In the event of the required valve configuration not being shown please do not hesitate to contact the factory as Parker Hannifin IPD offer bespoke customer solutions. See Catalogue 4190-CV for more details.

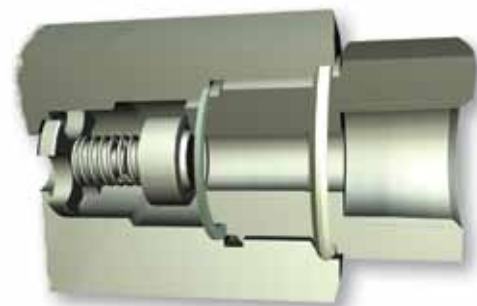

## Meeting the ISO Standard

From October 2007 all UK processing plants and power stations will have to comply with the EU's IPPC directive 96/61/EC. In essence, the IPPC Directive is about minimising pollution from various industrial sources throughout the European Union. An important part of this legislation is reducing Ultra-Low emissions, which will have significant consequences for all processes. According to the IPPS all plants and factories which fail to comply with the standards set by the directive may be closed from this point.

To put the scale of the challenge into perspective, a typical European refinery loses between 600 and 10,000 tonnes of emissions per annum. Around 70% of these losses are estimated to be caused by plant equipment such as pipe flanges, pumps, valves and vessels. Leakage from valves is often the biggest culprit, reportedly accounting for around 50% of the Ultra-Low emissions within the chemical and petrochemical industries.

Irrespective of the environmental impact, there is a tremendous financial burden on industry because it represents a huge loss of product, and cause of plant inefficiency. However, the true costs to industry are not always appreciated, as many of the costs associated with Ultra-Low emissions are hidden. Such as labour and materials to repair leaks, wasted energy, environmental fines and clean up costs, lost sales due to a poor green image, claims for personal injury and more. In this way, reducing Ultra-Low emissions not only protects the environment, but can save companies time and money.

With the above in mind, the legislation introduces a concept of Best Available Technique (BAT), urging plants to find the best available solution for reducing Ultra-Low emissions throughout the process, from areas such as design, product selection, fitting and fitter training, to maintenance, site monitoring, and so on.

With regard to the design and site monitoring of Ultra-Low emissions ISO 15848 parts 1 and 2 have been developed respectively.

Part 1 covers the classification system and qualification procedure for type testing of valves. The standard specifies three tightness classes of leakage with respect to stem sealing diameter. These classes are class A, B and C. Class A having the smallest environmental leakage. Each class level is one hundred fold lower than the class above i.e. a class B product may have a leakage of 100 times that of a class A product. The standard also specifies the duty that the valve has been tested to.



Parker Hannifin is now able to offer our full range of flanged products with a class A approval to ISO 15848-1. These products are identified as the Ultra-Low Emissions range and are certified as ISO FE AH-C01-SSA1-t(RT,180 C)-ANSI2500-ISO 15848-1. This states that the product has been classified as meeting the ISO 15848-1 standard with the following criteria;

- Class A tested with Helium
- Endurance class C01 a mechanical valve which has been tested throughout 500 mechanical actuations with two thermal cycles
- Temperature class RT-180 C Fully thermal cycled and tested from -29°C to +180°C Pressure class ANSI 2500 6000 psi in 316 st.st.

Part 2 of the international standard covers production acceptance testing of valves. This production testing can only be carried out to product which has already been approved to part 1 of the standard. Production testing can be carried out to and sampling percentage specified by the purchaser with a minimum of one per lot. The production testing is a simpler helium sniffer test which is carried out at room temperature with no mechanical actuations.



## Meeting the ISO Standard

Parker is now able to offer its range of Pro-Bloc® Double Block and bleed valves and Monoflanges to meet the new ISO 15848 standard for Ultra-low Emissions. The new designs provide process instrument interfaces of outstanding integrity to help processing organisations dramatically enhance their LDAR (leak detection and repair) programmes.

### ISO 15848 standard

ISO 15848 parts 1&2 (defining a classification system and qualification procedures, and production acceptance test of industrial valves, respectively) specify new Ultra-Low standards for emissions. This standard is becoming the requirement for oil and gas and petrochemical organisations worldwide. The standard was originally created for process valves and control valves but is now being applied to Instrumentation valves which include primary isolation valves, especially on environmentally sensitive projects.


Meeting these low levels is a challenge, which Parker Instrumentation has solved with the new ball and needle valve designs used in these Double Block and Bleed valves and monoflanges. These designs meet the highest class 'A' level over the temperature range -29°C to +180°C celsius, alongside the standard instrumentation manifold pressure ranges.

Production testing and certification is available upon request. Please specify sample quantity required for production testing with your order.

O-ring material grade is a fluoroelastomer FKM tetrapolymer, specially formulated for explosive decompression (ED) resistance. The seals are qualified to the stringent Norsok M-170 standard that covers both ED resistance and sour gas (H<sub>2</sub>S) ageing tests.


### Features

- Class A leakage rates achieved
- Bolted ball valve bonnet assembly
- All threads sealed from the media
- All ball valves are bi-directional
- Firesafe design available

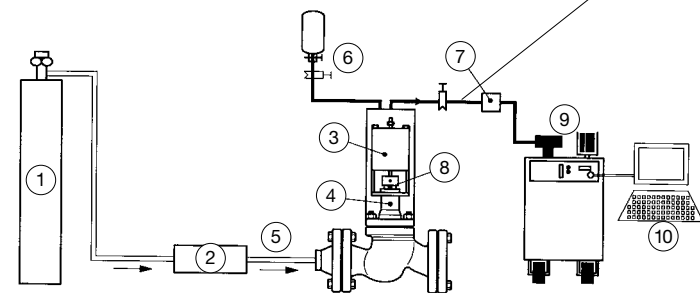

- Key
- |                        |                            |
|------------------------|----------------------------|
| 1 helium at 97% purity | 6 standard calibrated leak |
| 2 pressure control     | 7 vacuum safety            |
| 3 actuator             | 8 tested stem sealing      |
| 4 vacuum               | 9 helium mass spectrometer |
| 5 helium               | 10 data acquisition        |


Prototype testing schematic as per ISO 15848-1

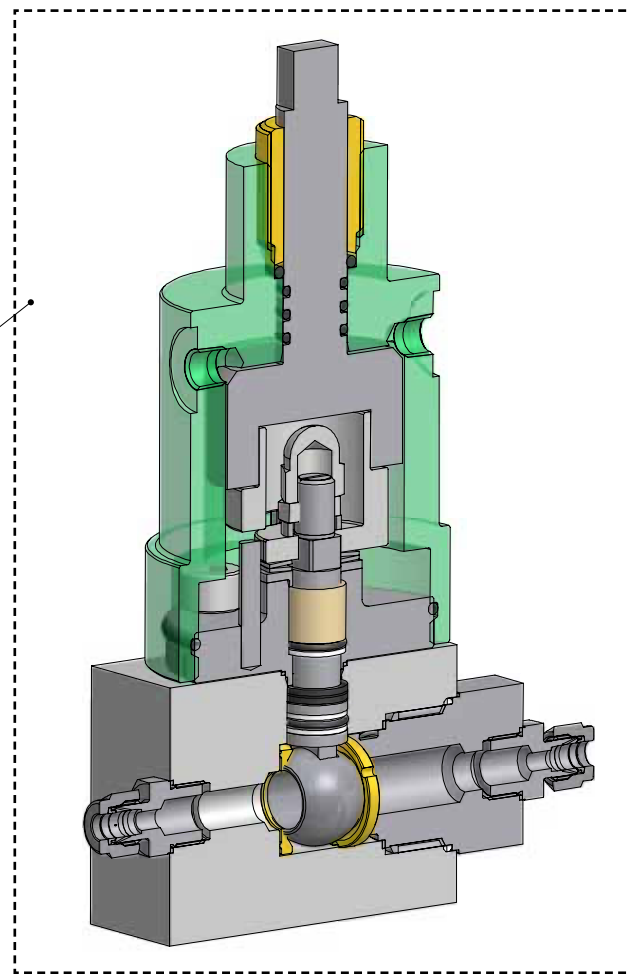

Ball valve ISO 15848-1 Prototype testing assembly

## Ultra-Low Emissions flange product ball valve specification

Handle options on page 4



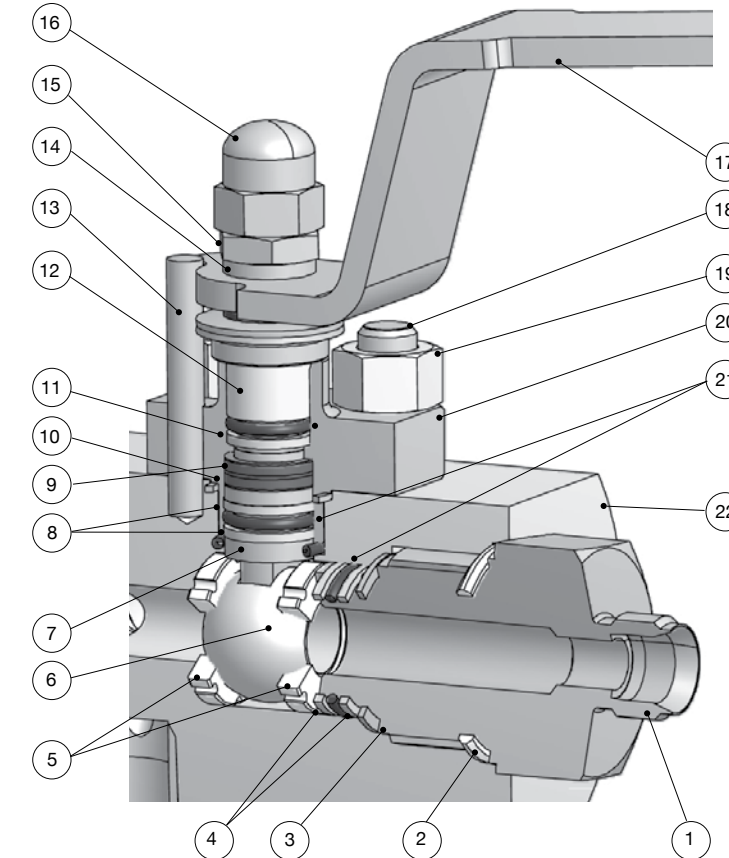


### Part description

Item	Description
1	End Connector
2	E-seal™
3	Sealing washer
4	Antiextrusion rings
5	Seats
6	Ball
7	Anti blowout stem
8	Antiextrusion rings
9	Gland packing
10	Sealing washer
11	Antiextrusion rings
12	Peek thrust bush
13	Stop pin
14	Thrust bush
15	Locknut
16	Locking dome nut
17	Handle
18	Bonnet strud
19	Lock nut
20	Bolted bonnet
21	Elastomeric o-ring
22	Body

### Specifications


- Tightness class A  $\geq 1 \times 10^{-6} \text{ mg.s}^{-1}.\text{m}^{-1}$ .
- Maximum cold working pressure rating 6,000 psig
- Temperature rating -29°C to 180°C (-20°F to 356°F)
- ISO15848-1 prototype tested using global helium vacuum method
- Performance class ISO FE AH-C01-SSA1-t(RT,180 C)-ANSI2500-ISO 15848-1
- Production testing and certification available on request
- Other specifications as per standard Hi-Pro, see page 4

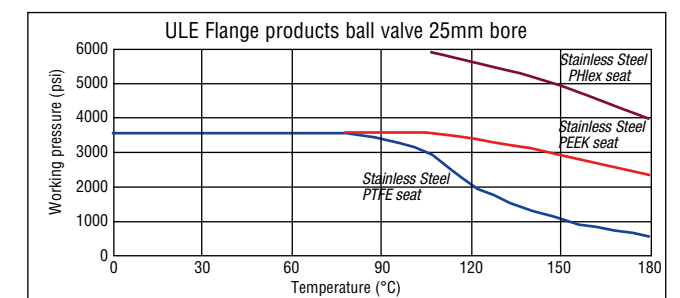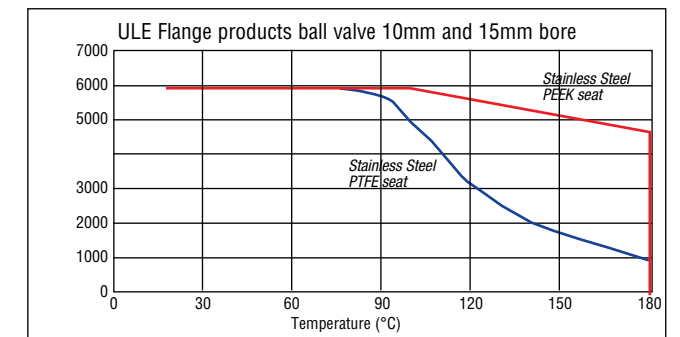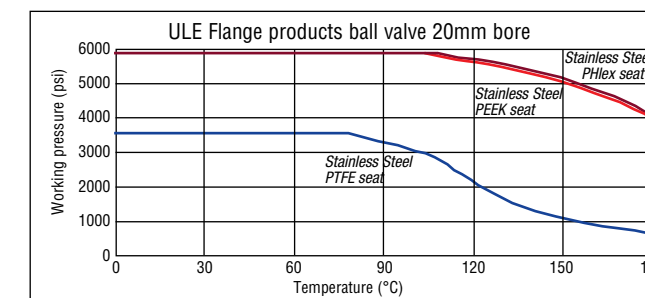

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 13.

# Flanged Products

## Ultra-Low Emission outside screw and yoke (OS&Y) needle valve

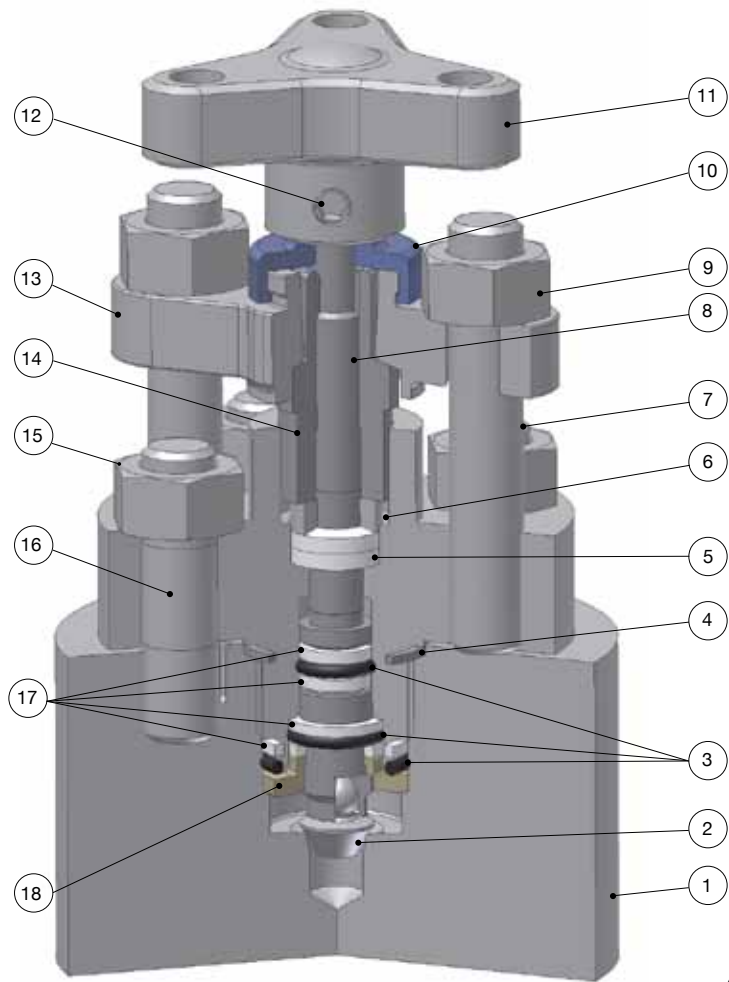


### Part description

Item	Description
1	Body
2	Spindle Tip
3	Elastomeric o-ring (body seal)
4	Body joint seal
5	Gland packing (adjustable)
6	Thrust bush
7	Bonnet bridge studding
8	Anti blow-out spindle
9	Bridge nuts
10	Dust cap
11	Handle
12	Positive handle retention
13	Bridge
14	Gland adjuster
15	Stud nuts
16	Body bonnet studding
17	Anti extrusion rings
18	Bonnet end cap

### Specifications

- Tightness class A  $\geq 1 \times 10^{-6}$  mg.s<sup>-1</sup>.m<sup>-1</sup>
- Maximum cold working pressure rating 6,000 psig (414 barg)
- Temperature rating -29°C to 180°C (-20°F to 356°F)
- ISO15848-1 prototype tested using global helium vacuum method
- Performance class ISO FE AH-C01-SSA1-t(RT,180 C)-ANSI2500-ISO 15848-1
- Production testing and certification available on request
- Other specifications as per standard OS&Y, see page 5


### Pressure vs temperature

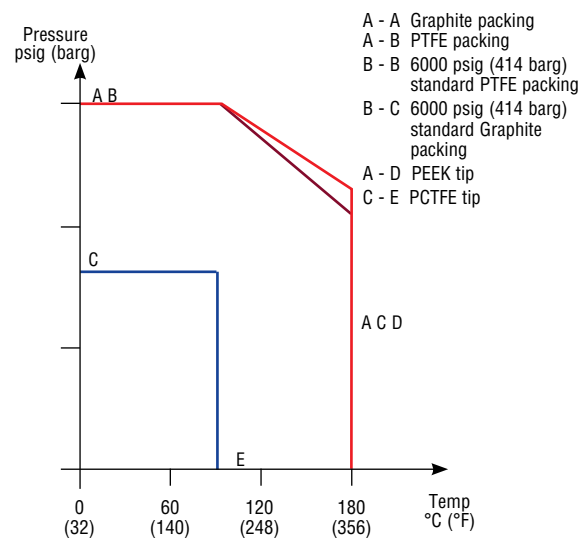

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 13.

# Flanged Products

## Ultra-Low Emissions "H" Series globe style needle valve

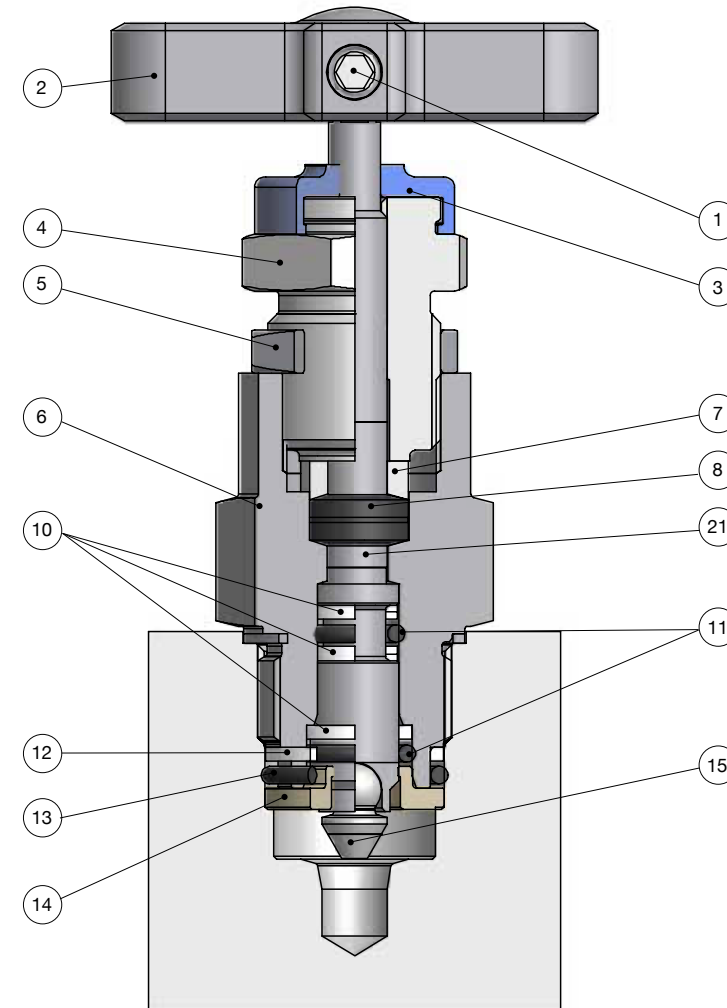


### Part description

Item	Description
1	Positive handle retention
2	"T" bar
3	Dust cap
4	Gland packing adjuster
5	Gland adjuster lock nut
6	Valve bonnet
7	Thrust bush
8	Gland packing (adjustable)
9	Anti blow-out spindle
10	Anti extrusion ring
11	Elastomeric o-ring (stem seal)
12	Anti extrusion ring
13	Elastomeric o-ring (body seal)
14	Bonnet end cap
15	Spindle tip

### Specifications

- Tightness class A =  $\geq 1 \times 10^{-6}$  mg.s<sup>-1</sup>.m<sup>-1</sup>
- Maximum cold working pressure rating 6,000 psig (414 barg)
- Temperature rating -29°C to 180°C (-20°F to 356°F)
- ISO15848-1 prototype tested using global helium vacuum method
- Performance class ISO FE AH-C01-SSA1-t(RT,180 C)-ANSI2500-ISO 15848-1
- Production testing and certification available on request
- Other specifications as per standard needle valve, see page 6

### Pressure vs temperature

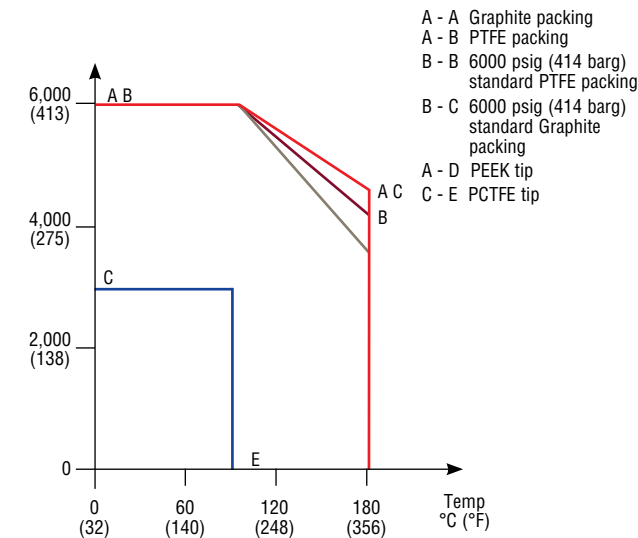

⚠ When selecting products for specific applications users should refer to our notice at the bottom of page 13.



# Flanged Products

## ISO15848 Class 'A' Ultra-Low Emission monoflanges - made easy

Select the style of Monoflange from the choice of arrangements below noting the complete **FEMF** reference. If the style or arrangement is not shown below please provide full description and specification.

	<b>Block bleed block</b> 1st Isolate: Needle 2nd Isolate: Needle Vent: Needle	<b>FEMFH100</b>		<b>Block bleed block</b> 1st Isolate: O.S.&Y. 2nd Isolate: Needle Vent: Needle	<b>FEMFY100</b>
	<b>Block block bleed</b> 1st Isolate: Needle 2nd Isolate: Needle Vent: Needle	<b>FEMFH110</b>		<b>Block block bleed</b> 1st Isolate: O.S.&Y. 2nd Isolate: Needle Vent: Needle	<b>FEMFY110</b>
	<b>Block &amp; bleed</b> 1st Isolate: Needle Vent: Needle	<b>FEMFH120</b>		<b>Block &amp; bleed</b> 1st Isolate: O.S.&Y. Vent: Needle	<b>FEMFY120</b>
	<b>Block &amp; bleed</b> 1st Isolate: Needle Vent: Needle	<b>FEMFH130</b>		<b>Block &amp; bleed</b> 1st Isolate: O.S.&Y. Vent: Needle	<b>FEMFY130</b>
	<b>Double block</b> 1st Isolate: Needle 2nd Isolate: Needle	<b>FEMFH140</b>		<b>Double block</b> 1st Isolate: O.S.&Y. 2nd Isolate: Needle	<b>FEMFY140</b>
	<b>Single block</b> 1st Isolate: Needle	<b>FEMFH150</b>		<b>Single block</b> 1st Isolate: O.S.&Y.	<b>FEMFY150</b>

◆ For dual outlets specify FEMF\*105. ▲ For dual outlets specify FEMF\*115.  
For flange to flange variants replace FEMF\*1\*\* with FEMF\*2\*\*.  
For bleed port only specify FEMF\*160.  
Please note vent valve is not anti-tamper as standard.

# Flanged Products

## ISO15848 Class 'A' Ultra-Low Emission Monoflanges

### Example FEMFY100 B 32T2500

1. Monoflange part number  
Insert from page 28

2. Material  
**A** Carbon Steel ASTM A105  
**B** Stainless Steel ASTM A182-F316  
**D** Monel M400  
**E** Duplex ASTM A182-F51  
**F** Super Duplex ASTM A182-F53/F55  
**G** Hastelloy C-276  
**H** Low Temp. C. St. ASTM A350 LF2  
**K** 6Mo  
**M** Inconel 625

3. Flange details

Flange Size	Flange Face Style	Flange Class
8 = 1/2	F = Raised Face Spiral	150 = 150
12 = 3/4	T = Ring Type Joint	300 = 300
16 = 1		600 = 600
24 = 1 1/2		900 = 900
32 = 2		1500 = 1500
API specify separately		2500 = 2500
DIN see page 20		136 = 150/300/600
*1/2 flange size only		

4. Outlet style (1/2" FNPT is standard NO part designator needed)

Size	Connection Style
4 = 1/4	F = Female NPT Thread
6 = 3/8	M = Male NPT Thread
8 = 1/2	A = A-LOK (inverted only)
M6 = 6mm	G = Swivel gauge adaptor 1/2 NPTF (fitted)
M10 = 10mm	
M12 = 12mm	

5. Plugged vent (1/4" FNPT is standard NO part designator needed)

Size
V6 = 3/8 FNPT
V8 = 1/2 FNPT

8. Condition  
**F** Firesafe design (primary only - O.S.&Y. needle valve)  
**N** NACE  
 Combine designators as required  
 Ultra-low Emission production testing available on request  
 Please Note:  
 Certification requirements and customer specifications MUST be provided at enquiry and order stage.

7. Valve handle operating options  
**A\*** Anti tamper  
**L\*** Padlock handle locking  
**R\*** Regulating tip ( H series needle valve only)  
**Y\*** O.S.&Y. valves  
 \* Insert valve number 1 = primary, 2 = secondary, 3 = vent, 4 = all. Padlocks not supplied

6. Valve packing and seat materials  
**\*** PTFE Packing  
**\*** Needle tip 17-4PH St. St.  
**3** Graphoil (fitted as standard when fire safe design is specified)  
**PN** PEEK Needle tip all valves (non fire safe only)  
 \* fitted as standard no part NO designator required.

**IMPORTANT NOTES**

When selecting products for specific applications users should refer to our notice at the bottom of page 19.

All non wetted parts will be supplied in standard stainless steel for exotic materials. For carbon steel construction trim materials will be supplied in stainless steel.

Ring type joints (T) CANNOT be supplied for 1/2 & 3/4 class 150 flanges.

St. St. grades 302 and 304 are NOT used in the construction of any of these products.

For customer specific options not covered here engineering will allocate a part number at quotation stage.

Certification requirements and customer specifications MUST be provided at enquiry and order stage.

For API flange requirements full details must be specified separately.





Part number example FEMFY100B32T2500A3F Ultra-Low Emission Monoflange - Double Block and Bleed - Block (O.S.&Y.) Bleed (Needle) Block (Needle) (FEMFY100) - 316 St. St. construction (B) - 2 Pipe flange, Ring type joint, class 2500 (32T2500) - 1/2 female NPT outlet - 1/4 Female NPT vent - Anti-tamper vent (A3) - Firesafe design and certified (F), valves fitted with PTFE packing, metal seated 17-4PH st.st. tips.

# Flanged Products






## ISO15848 Class 'A' Ultra-Low Emission Pro-Blocs

Select the style of Pro-Bloc from the choice of arrangements below noting the complete FEPB reference.

### Style

	Single piece forging flange x screw <b>FEPB*1**</b>		Single piece forging flange x flange <b>FEPB*2**</b>
	Modular construction flange x screw <b>FEPB*5**</b>		Modular construction flange x flange <b>FEPB*6**</b>

### Arrangement

	Block bleed block Flange x screw 1st Isolate: Ball 2nd Isolate: Ball Vent: Needle <b>FEPB**00</b>		Block bleed block Flange x screw 1st Isolate: Ball 2nd Isolate: Needle Vent: Needle <b>FEPBY*10</b>
	Block & bleed Flange x screw 1st Isolate: Ball Vent: Needle <b>FEPB**30</b>		Double block Flange x screw 1st Isolate: Ball 2nd Isolate: Needle <b>FEPBY*50</b>
	Double block Flange x screw 1st Isolate: Ball 2nd Isolate: Ball <b>FEPB**t60</b>	<p>● Only available with 10mm bore ball valve. Single isolate. —⊕— specify FEPB*165, FEPB*265.</p>	

# Flanged Products

## ISO15848 Class 'A' Ultra-Low Emission Pro-Blocs

**Example FEPBY 1 00 B 32T2500 F**

**1. Ball valve bore size**  
 Y = 10mm  
 X = 15mm  
 W = 20mm  
 V = 25mm

For style see page 30 section 'Style'

For arrangement see page 30 section 'Arrangement'

**2. Material**  
 A Carbon Steel ASTM A105  
 B Stainless Steel ASTM A182-F316  
 D Monel M400  
 E Duplex ASTM A182-F51  
 F Super Duplex ASTM A182-F53/F55  
 G Hastelloy C-276  
 H Low Temp. C. St. ASTM A350 LF2  
 K 6Mo  
 L 825  
 M Inconel 625

Flange Size	Flange Face Style	Flange Class
½ = 1/2	F = Raised Face Spiral	150 = 150
¾ = 3/4	T = Ring Type Joint	300 = 300
1 = 1		600 = 600
1 1/2 = 1 1/2		900 = 900
2 = 2		1500 = 1500
3 = 3 (25mm bore only)		2500 = 2500
API } specify separately		
DIN } See page 20		

á Certain flange/bore size combinations not available - consult factory

**3. Flange details**

**4. Outlet style (each bore size has its own standard size female NPT outlet - the standard does not require this field to be completed)**  
**Standard outlets (female NPT)**  
 10mm bore = 1/2  
 15mm bore = 1/2  
 20mm bore = 3/4  
 25mm bore = 1  
 For optional outlets see page 20

**5. Plugged vent (1/2" NPTF is standard NO part designator needed)**

**6. Packing, seat and construction options**  
 \* PTFE Packing  
 \* PTFE Ball seats  
 \* Needle tip 17-4PH St. St.  
**PK** PEEK Ball and needle seating  
**PB** PEEK Ball seats  
**PN** PEEK Needle tip (non firesafe only)  
**BC** Bolted construction connection  
 \* fitted as standard no part NO designator required.

**7. Valve handle operating options**  
 A\* Anti tamper (Needle Valve only)  
 L\* Padlock handle locking  
 R\* Regulating tip ( H series Needle Valve only)  
 S\* Spanner actuated (Ball Valve only)  
 Y\* O.S.&Y. Needle Valve  
 \* Insert valve number 1 = primary, 2 = secondary, 3 = vent, 4 = all. Padlocks not supplied  
 Note: Firesafe needle valve with locking device NOT available

**8. Certification & condition**  
 F Firesafe design and certified  
 H Heat code certificates to EN10204.3.1.B  
 N NACE  
 Combine designators as required  
 Ultra-Low Emission production testing available on request



# Parker Worldwide

**AE – UAE, Dubai**  
Tel: +971 4 8875600  
parker.me@parker.com

**AR – Argentina, Buenos Aires**  
Tel: +54 3327 44 4129

**AT – Austria, Wiener Neustadt**  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe, Wiener Neustadt**  
Tel: +43 (0)2622 23501 970  
parker.easteurope@parker.com

**AU – Australia, Castle Hill**  
Tel: +61 (0)2-9634 7777

**AZ – Azerbaijan, Baku**  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LX – Belgium, Nivelles**  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BR – Brazil, Cachoeirinha RS**  
Tel: +55 51 3470 9144

**BY – Belarus, Minsk**  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CA – Canada, Grimsby, Ontario**  
Tel +1 905-945-2274  
ipd\_canada@parker.com

**CH – Switzerland, Etoy**  
Tel: +41 (0) 21 821 02 30  
parker.switzerland@parker.com

**CN – China, Shanghai**  
Tel: +86 21 5031 2525

**CZ – Czech Republic, Klecany**  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**  
Tel: +34 902 33 00 01  
parker.spain@parker.com

**FI – Finland, Vantaa**  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Athens**  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HK – Hong Kong**  
Tel: +852 2428 8008

**HU – Hungary, Budapest**  
Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland, Dublin**  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IN – India, Mumbai**  
Tel: +91 22 6513 7081-85

**IT – Italy, Corsico (MI)**  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**JP – Japan, Fujisawa**  
Tel: +(81) 4 6635 3050

**KR – South Korea, Seoul**  
Tel: +82 2 559 0400

**KZ – Kazakhstan, Almaty**  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

**LV – Latvia, Riga**  
Tel: +371 6 745 2601  
parker.latvia@parker.com

**MX – Mexico, Apodaca**  
Tel: +52 81 8156 6000

**MY – Malaysia, Shah Alam**  
Tel: +603-78490800

**NL – The Netherlands, Oldenzaal**  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway, Stavanger**  
Tel: +47 (0)51 826 300  
parker.norway@parker.com

**NZ – New Zealand, Mt Wellington**  
Tel: +64 9 574 1744

**PL – Poland, Warsaw**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal, Leca da Palmeira**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Sp nga**  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SG – Singapore,**  
Tel: +65 6887 6300

**SK – Slovakia, Bansk Bystrica**  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TH – Thailand, Bangkok**  
Tel: +662 717 8140

**TR – Turkey, Istanbul**  
Tel: +90 216 4997081  
parker.turkey@parker.com

**TW – Taiwan, Taipei**  
Tel: +886 2 2298 8987

**UA – Ukraine, Kiev**  
Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom, Barnstaple**  
Tel: +44 (0)1271 313131  
parker.uk@parker.com

**US – USA, Cleveland**  
Tel: +1 216 896 3000

**VE – Venezuela, Caracas**  
Tel: +58 212 238 5422

**ZA – South Africa, Kempton Park**  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

European Product Information Centre  
Free phone: 00 800 27 27 5374  
(from AT, BE, CH, CZ, DE, DK, EE, EI, ES, FI,  
FR, IT, NL, NO, PL, RU, SE, SK, UK, ZA)

