

SS691 Datasheet

SUBSEA HYDRAULIC PRESSURE REGULATOR



Gas
 Liquid
 |
 Diaphragm
 Piston
 |
 Self-Venting
 Non-Venting
 |
 Max Inlet: 1,034 bar (15,000 psi)
 |
 Max Outlet: 690 bar (10,000 psi)
 |
 Cv 0.1



INTRODUCING THE SS691...

The SS691 is a piston-sensed low-flow subsea pressure regulator with ceramic seating for water-based hydraulic oil applications and systems. With the balanced main valve option it can provide stable control under varying inlet pressures and cope with higher flow rates.

Operating at depths of up to 3,000 metres (10,000ft), the SS691 uses either the external seawater pressure as a reference or works within a sealed chamber to remain completely unaffected by atmospheric conditions.

SPECIFICATION

Max. Rated Inlet Pressure	1,034 bar (15,000 psi)
Outlet Ranges	Up to 690 bar (10,000 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	10.5kg (23.1lbs)

* Pressure regulator rating may be limited by connection type, Cv and/or seat material

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	AISI 316/316L Stainless Steel (UNS S31600/S31603)
Main Valve Pin	AISI 316/316L Stainless Steel (UNS S31600/S31603) or Ceramic
Seat	Ceramic
Valve Spring	MP35N (UNS R30035)
Piston	AISI 316/316L Stainless Steel (UNS S31600/S31603)
Locking Cap	AISI 316/316L Stainless Steel (UNS S31600/S31603)
O-Rings	NBR
Loading Spring	MP35N (UNS R30035)

FEATURES AND BENEFITS

1 SUITABLE FOR DEEPER WATERS

Can operate at depths of up to 3,000 metres (10,000ft).

2 ANTI-TAMPER LOCKING CAP

Cap prevents unwanted pressure adjustments to regulator.

3 MP35N VALVE SPRING

Very high strength with excellent corrosion resistance for sea water ref options.

4 OPTIONAL REMOTE OPERATION

Optional ROV handwheel or subsea multi-turn electric actuator.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK

PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com

070920

PAGE:
1 OF 4

SS691 Datasheet


SUBSEA HYDRAULIC PRESSURE REGULATOR



● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Venting ● Non-Venting | Max Inlet: 1,034 bar (15,000 psi) | Max Outlet: 690 bar (10,000 psi) | Cv 0.1

DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 3/8" Medium Pressure option - please contact the office for additional connection options.

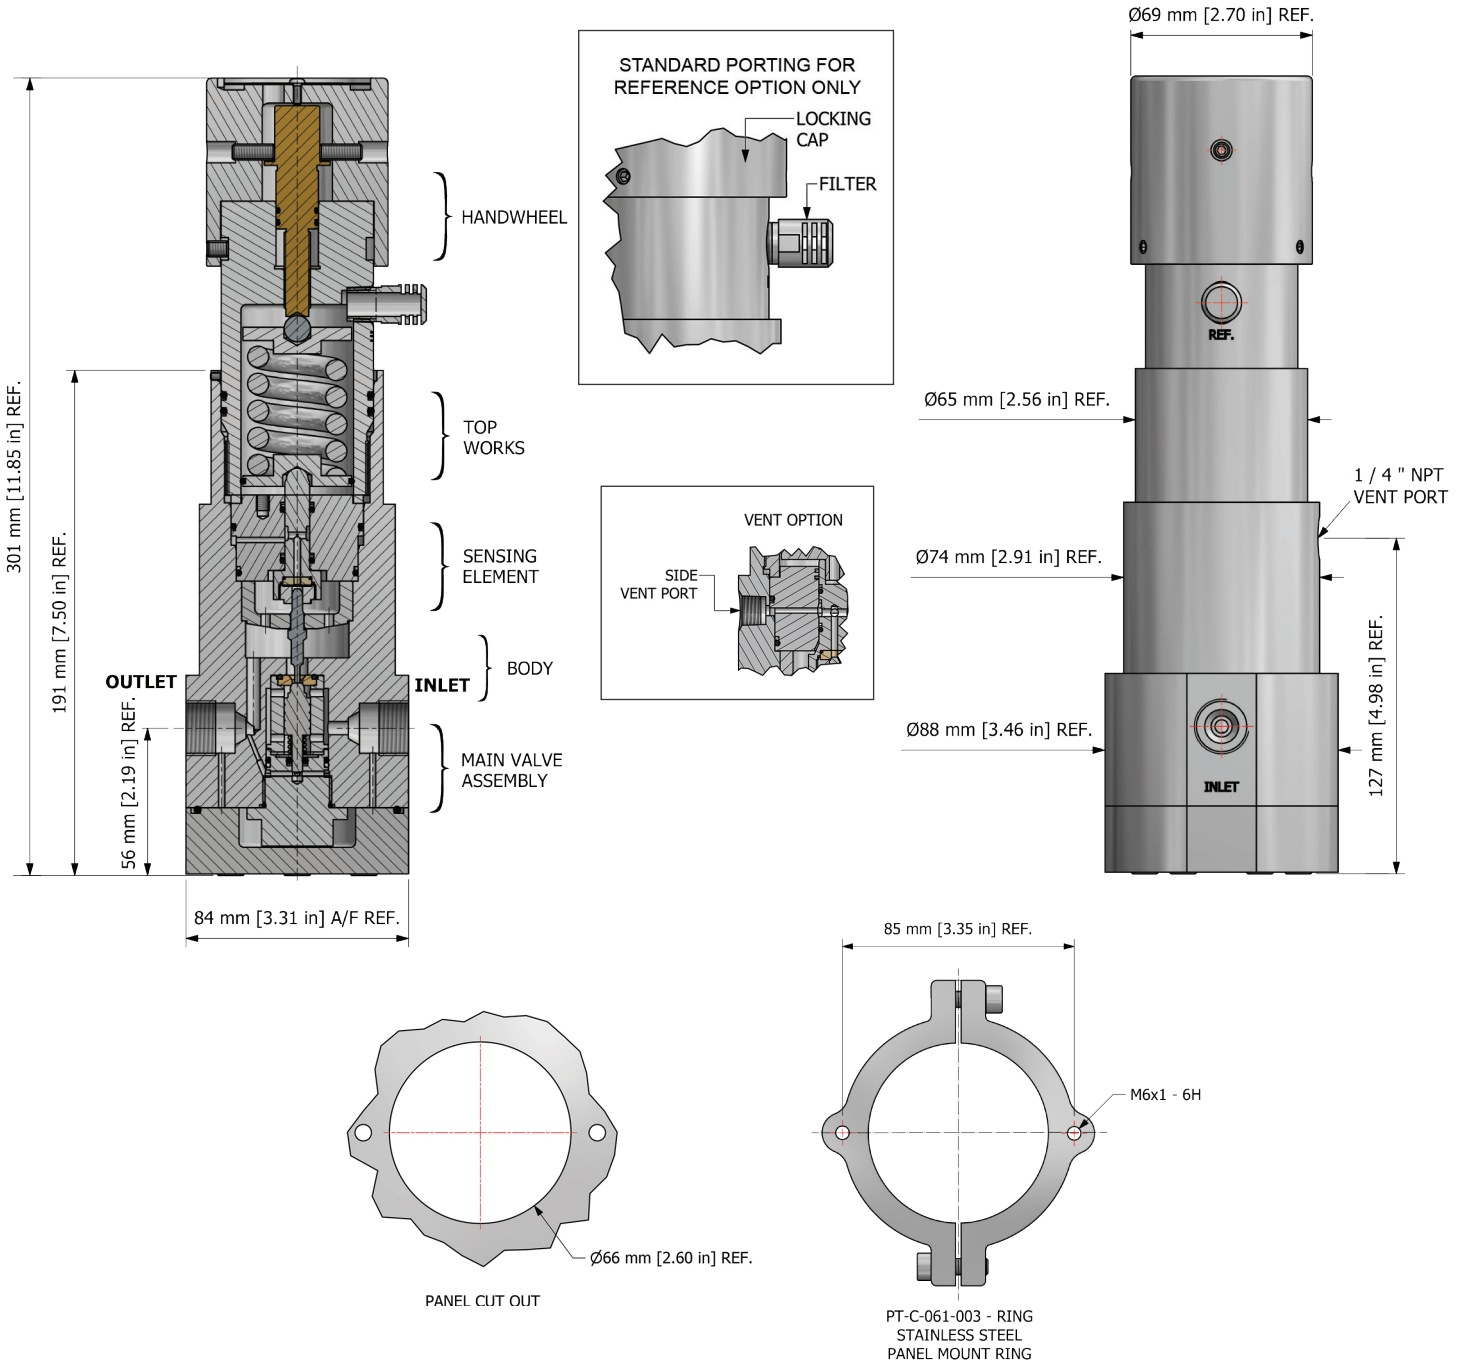

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK

PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH
 T +44 (0)1457 899 307
 E sales@pressure-tech.com
 W www.pressure-tech.com

070920

PAGE:
2 OF 4

SS691 Datasheet

SUBSEA HYDRAULIC PRESSURE REGULATOR




Gas Liquid | Diaphragm Piston | Self-Venting Non-Venting | Max Inlet: 1,034 bar (15,000 psi) | Max Outlet: 690 bar (10,000 psi) | Cv 0.1

FLOW CURVE

Please contact the office for further information.

PORTING CONFIGURATIONS



Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK



PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com

070920

PAGE:
3 OF 4

SS691 Datasheet


SUBSEA HYDRAULIC PRESSURE REGULATOR



Gas
 Liquid
 Diaphragm
 Piston
 Self-Venting
 Non-Venting
 Max Inlet: 1,034 bar (15,000 psi)
 Max Outlet: 690 bar (10,000 psi)
 Cv 0.1

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

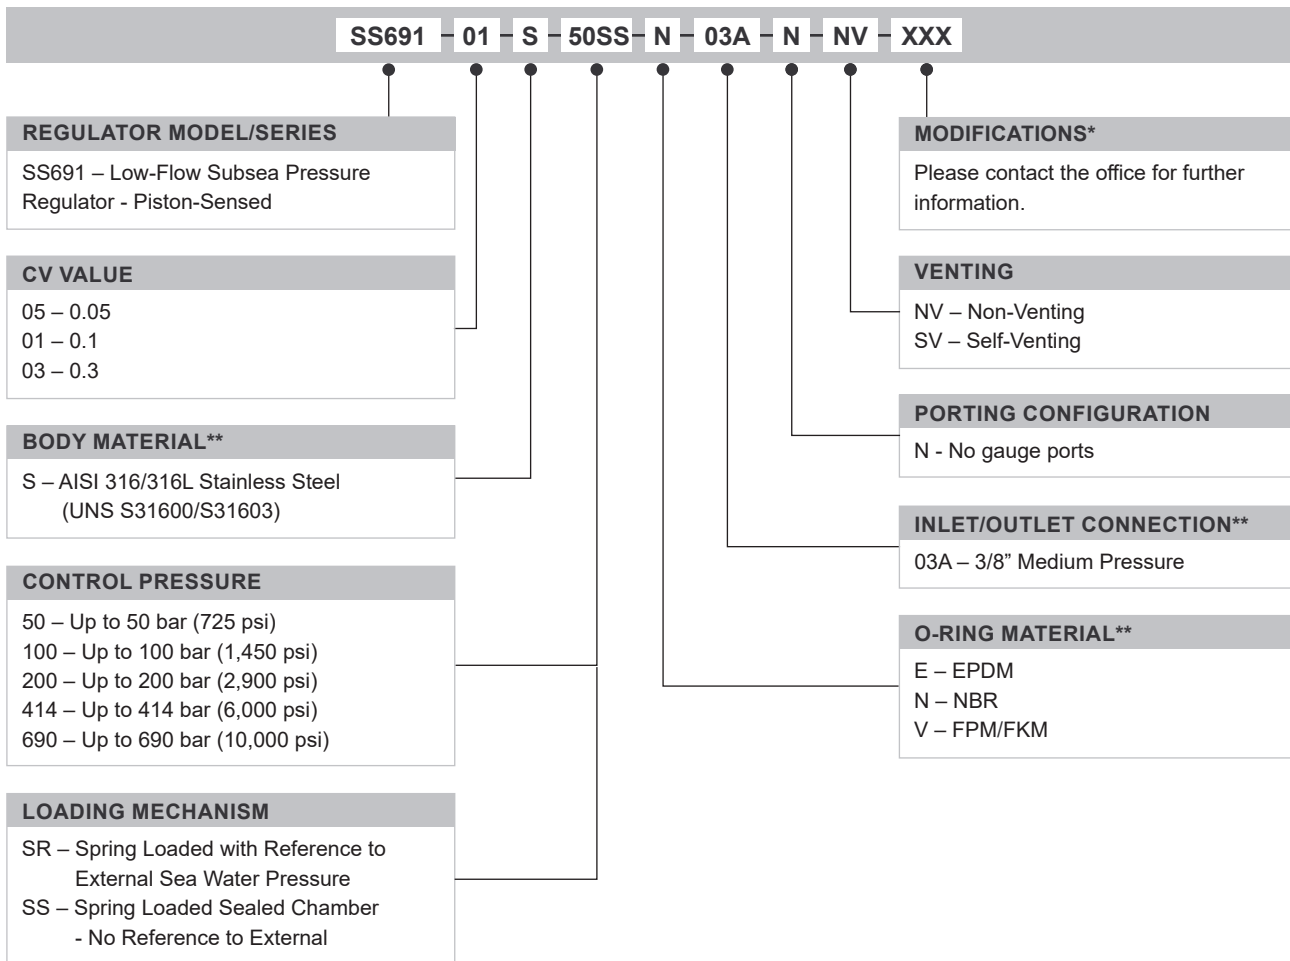

OPTIONAL EXTRAS		
	PART NUMBER	DESCRIPTION
Service Kit	SRK-SS691...	Various options available
Panel Mounting Ring	PT-C-061-003-RING	-

Note: Ancillary equipment also available

TRADEMARK: Elgiloy® is a registered trademark of Elgiloy Specialty Metals
Hastelloy® is a registered trademark of Haynes International, Inc

* Where applicable
** Other connections/materials may be available - please contact the office

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues.
Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK

PRESSURE TECH LTD
Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH
T +44 (0)1457 899 307
E sales@pressure-tech.com
W www.pressure-tech.com

070920

PAGE:
4 OF 4